Theses and Dissertations   1. Thesis and Dissertation Collection, all items

1966-05

Collected commentary relating to the flow of water and dredged solids through hydraulic pipelines

Van Leer, Blake W.

Princeton University

http://hdl.handle.net/10945/9462

COLLECTED COMMENTARY RELATING
TO THE FLOW OF WATER
AND DREDGED SOLIDS
THROUGH HYDRAULIC PIPELINES

BLAKE W. VAN LEER

COLLECTED COMMENTARY RELATING TO THE FLOW OF

WATER AND DREDGED SOLIDS THROUGH

HYDRAULIC PIPELINES

by

Lt. Cdr. Blake W. Van Leer, CEC, USN

A thesis submitted in partial fulfillment
of the requirements for the degree of
Master of Science in Engineering from
Princeton University, 1959

PREFACE

During the past year that the author has had
the privilege of undertaking postgraduate study at Princeton,
the field of hydraulic dredging has presented itself
repeatedly in the literature of waterfront construction and
harbor improvement as a subject of challenging magnitude.
It is partly a result of the author's ignorance of the
subject and partly due to his interest in the large
economies that can result from the use of hydraulic fills,
that a study of the field of hydraulic dredging was under-
taken.

An examination of hydraulic dredging, its problems
and those areas needing applied study led the author to write
several firms engaged in this field. To each addressee was
directed the question, "What subject or subjects in the broad
field of dredging do you feel is in need of study and research?"
In reply to this query, Mr. DeWitt D. Barlow, Jr. of the
Atlantic, Gulf and Pacific Company listed three subject areas
relating to dredge pipelines as follows:

  a. Investigation of the transition point
    (or range) between colloidal solutions
    and mixtures of water and solids.

  b. A study of the relation of friction
    losses to percent solids in the mixture;
    or the relation of friction losses to
    particle size.

  c. A study of the most economical pipeline
    velocity.

The author is very much indebted to Mr. Barlow, for it is upon the three proposals listed above that this thesis is centered and, concerning which, a concerted effort has been made to develop a single source of information. Of great benefit and inspiration to the author have been the assistance and encouragement of Dr. R. H. Wilhelm, Chairman of the Department of Chemical Engineering; Vice Admiral W. M. Angas, Chairman of the Department of Civil Engineering; Professor N. J. Sollenberger and Professor J. L. Green both of the Department of Civil Engineering. In particular, the personal encouragement of Professor Sollenberger, as thesis advisor, has been most stimulating and helpful. Last but not least, the humble gratitude of the author is expressed to his wife, Anne, who suffered through the role of student wife once more, to the end, that the author could complete his studies.

The author has applied to his subject matter the knowledge of his background as a Mechanical Engineer (Duke University, 1945), a Civil Engineer (Rensselaer Polytechnic Institute, 1952), a Naval Officer in the Civil Engineer Corps with 16 years of varied and extensive service in all phases of engineering, and as a registered professional engineer (N.Y. State) However, it is with limited previous specific knowledge of his subject and with a sincere appreciation of his shortcomings that the author has set forth his considerations and evaluations of the work of others in this field and allied fields covering fluid transport criteria and phenomena.

SUMMARY

A study has been conducted of the published information available relating to the flow of water and dredged solids in hydraulic pipelines. The author presents a colligation of data and information on three specific subjects.

    a. Transition point or range between colloidal mixtures and water-solids mixes.

    b. Relation of friction loss to particle size or concentration.

    c. Economic pipeline velocity.

This threefold division of transport phenomena is treated broadly under a development of theoretical aspects, an extensive reference survey, and an analysis of the various approaches and considerations advanced by other writers.

    It is concluded that for water-solids flow:

    a. Little published data is available on the transition point or range between colloidal mixture and water-solids mixes and, hence, no distinct demarcation can be stated. However, there appears to be little to commend study of this relationship as an important flow characteristic.

    b. Friction loss seems best related to concentration rather than particle size.

    c. The most economical pipeline velocity is that which corresponds to incipient deposition.

The author recommends that much greater effort
be made in applied research and evaluation particularly in
the evaluation of the currently published theories of solid-
liquid flow. Full scale tests of dredge equipment under actual
operating conditions with the investigation of theoretical
relationships as a central aim are strongly needed. Much of
the currently available theoretical knowledge awaits the proof
or disproof of such actual tests.

The author contends that utilization of existing
theoretical data and formulae for design and operating
procedure depends on the outcome of future experimentation
and investigation. At present, there is little in the
theoretical that could replace the current "rule of thumb"
operation of the experienced dredge operator.

TABLE OF CONTENTS

LIST OF FIGURES

NOTATION

a — Distance measured from bed of channel where C_a is measured   L

A — Area L^2

A_1, A_2, A_3 — Constants   --

C — Local concentration in per cent by weight   --

C_1 — Relative absolute volume of sediment   --

C_a — Local concentration in per cent by weight at distance a from the bed of channel   --

C_T — Total sediment load concentration in per cent by weight   --

C_x — Drag coefficient for a given sediment size   --

d — Median diameter of sediment in mm   L

D — Diameter of the pipe   L

D_1 — Depth of flow   L

E — Energy required per foot of pipe per pound of sediment transported per second   LF/L/F/T

F_D — Drag force   F

f — Darcy-Weisbach resistance coefficient with or without sediment present   --

f_1 — That component of f for sediment-laden flow, which is contributed by clear water flow   --

f_2 — That component of f for sediment-laden flow, which is contributed by total sediment load carried; $f = f_1 + f_2$ --

Fr — Froude Number $\left| \dfrac{V^2}{gD} \right|$ --

g — Gravitational acceleration L/T^2

I — Intercept from d/D versus P plot   --

J — Hydraulic gradient along the pipe length with or without sediment — --

J_e — Hydraulic gradient along the pipe length with clear water — --

K — Karman constant — --

KE — Kinetic energy per unit volume — $(F)(L)/L^2$

k — Nikuradse equivalent uniform sand diameter — L

K_1, K_2, K_3 — Constants — --

$\mathcal{l}$ — Mixing length in the theory of turbulence — L

L — Length of pipe — L

M — Rate of lateral transport — F/T

m — Constant — --

n — Constant — --

p — Pressure — F/L^2

P — Intercept on the $Re\sqrt{f}$ versus C_T plot — --

Q — Discharge of clear water or water sediment mixture — L^3/T

q — Ratio of solids to air by weight — --

r — Distance from pipe center line to point of determination — L

R — Radius of pipe or tube ($2R = D$) — L

Re — Reynolds Number — --

s — Slope of energy gradient, slope of water surface for open channel flow, or slope of pipe — --

S_1 — Reciprocal of slope of plot of P versus d/D — --

S_F — Shape factor for sediment — --

t — Time . — T

u, v, w - Mean velocity at a given point in the x, y and z directions respectively $\qquad$ L/T

u', v', w' - Velocity fluctuations in x, y, and z directions, respectively $\qquad$ L/T

V $\quad$ - Mean velocity over the total area of pipe $\qquad$ L/T

V_L $\quad$ - Limit deposit velocity $\qquad$ L/T

ω $\quad$ - Settling velocity of the sediment particle $\qquad$ L/T

W $\quad$ - Rate of sediment transport $\qquad$ m/T

y $\quad$ - Depth of flow $\qquad$ L

y_s $\quad$ - Depth of sand deposit $\qquad$ L

Z and Z_1 - Constants $\qquad$ --

β $\quad$ - Factor of proportionality $\qquad$ --

γ_s $\quad$ - Unit weight of sediment $\qquad$ F/L^3

γ_m $\quad$ - Unit weight of mixture $\qquad$ F/L^3

γ_w $\quad$ - Unit weight of water $\qquad$ F/L^3

ε $\quad$ - Dynamic coefficient of turbulent viscosity (eddy viscosity) $\qquad$ L^2/T

ε_m $\quad$ - Momentum exchange coefficient $\qquad$ L^2/T

ε_s $\quad$ - Sediment exchange coefficient $\qquad$ L^2/T

ψ $\quad$ - Dimensionless function $\qquad$ --

η $\quad$ - Coefficient of turbulent viscosity or "eddy" viscosity $\qquad$ FT/L^2

λ - Longitudinal spacing between roughness elements $\qquad$ L

μ - Coefficient of viscosity $\qquad$ FT/L^2

ν - Dynamic viscosity $\qquad$ L^2/T

ρ - Mass density of mixture $\qquad$ $\dfrac{FT^2/L}{L^3}$

ρ_a — Mass density of air $\dfrac{FT^2/L}{L^3}$

ρ_s — Mass density of sediment $\dfrac{FT^2/L}{L^3}$

ρ_w — Mass density of fluid $\dfrac{FT^2/L}{L^3}$

σ_g — Geometric standard deviation --

$\tilde{\tau}$ — Intensity of shear F/L^2

ϕ — Variable characterizing boundary form --

ψ — Function of --

Δp — Pressure differential F/L^2

CHAPTER I. INTRODUCTION

Purpose

The purpose of this thesis is primarily the collection of data and written material on the movement of dredged solids through pipelines. Particular emphasis is to be placed on the following within the limits of available source material and knowledge:

      a.   Transition point or range between a colloidal mixture and water-solids mixture.

      b.   Relation of friction loss to particle size or concentration.

      c.   Study of the economic pipeline velocity.

It is fundamental, then, to the purpose of this thesis to centralize and present, to the greatest possible extent, all of the available information on the subject matter.

In particular, this thesis will present a reference study of the subject, an analysis of most of the current methods or approaches to the resolution of data in theory and practice, and the author's summary and recommendations as to future requirements, research, and further evaluation.

Scope

The general endeavor of the author has been to limit this writing to information concerning the threefold purpose aforementioned. However, instances do occur where added

information has been recorded in the interest of fully obtaining clarity of the subject matter. The attempt has been made to gather related information from other fields with similar problems. Therefore, the reference study contains much of the data published by mechanical engineers, chemical engineers, aeronautical engineers, sedimentologists, and many others, as well as civil engineers. In each case, the intent is to insure that data or information analogous to hydraulic dredging is presented.

In hydraulic dredge pipelines, a wide range of physical characteristics is observed. For example, solids can range from colloidal particles to large boulders 27 inches in maximum dimension; pipelines are normally smooth circular conduits of which 30 inch diameter sizes are not uncommon; pipeline velocities range up to 36 feet per second and more; concentrations average about 15% by weight, but are apt to vary considerably depending on the efficiency of the leverman. The scope, then, of this thesis is on the one hand quite broad if all of the individual physical criteria which enter the process of transportation of dredged solids are considered, and quite narrow in the sense that the process is only a small part of the broad field of two phase transport phenomena.

Dredging and the Hydraulic Pipeline

The first hydraulic dredge was built in the United States in 1872. From then until the present dredges and dredging

operations have been developed largely through the teachings
of field experience. "Rule of thumb" is the common basis
for practically all dredging operations. In very few fields,
particularly one of the age of dredging, does one encounter such
a lack of published theory regarding design and operational
problems. However, this is not too surprising for when one
examines the developments that have been made in fluid mechanics,
it is quickly noted that much of the current understanding of
fluids and fluid phenomena has been developed in the last
30 years. Still, the author was quite amazed to find that relativel
little theory has been developed and that which exists has not
been fully tested, evaluated, or, more important, applied.

It is significant that the cost of just the annual
maintenance dredging in the United States for harbor and river
channel work is a multimillion dollar business that keeps a
large fleet of dredges belonging to the U. S. Army Engineers and
a sizeable number of private dredges engaged in full time
operation. Also of note is the underlying fact that fill material
or excavated material can be moved by dredging and hydraulic
pipeline at a cost which is considerably cheaper than any other
presently known method of earth moving, the only proviso being
the availability of water. A recent example of this is the
Dutch firm that successfully completed a contract for waterfront
construction that involved, among other things, the excavation
of 40 feet of peat from a 300 acre site in England. The job

was accomplished at a reduced cost by dismantling a dredge in the Netherlands, shipping it to England, reassembling it on the construction site, flooding the area and, finally, dredging the peat. The economics of dredging, then, are such that any research which produces a small improvement can, in fact, effect large savings in costs.

It is the intent of this thesis, however, to treat only a portion of the subject of dredging. This portion may be roughly described as the operation and functioning of the <u>hydraulic dredge pipeline</u>. At this point it is well to state that, for the purposes of this thesis, the words, <u>sediment</u>, <u>dredged solids</u>, <u>dredged material</u>, or <u>solids</u>, are all used interchangeably to describe broadly the discrete solid particles which may be transported by a given fluid. In this small sector of dredge operations, pipeline flow of water and solids, the author has found the work of others on recent transportation of coal and water mixtures by pipeline extremely helpful, as is the work of sedimentologists in the literature of sediment transport on rivers and alluvial streams. Papers treating the subjects of irrigation, drainage, sewerage, transport of minerals, ores, and slurries, as well as many other industrial processes dealing with two phase flow have been extremely valuable as source material for this thesis. Some authors have attempted to bring much of this data together, however, it is surprising that much greater effort has not been expended in this regard. The author is firmly convinced that given ample time a more

thorough reference study than that which is presented in this thesis, would be of great benefit to the dredging industry. Such a study would undoubtedly provide a firmer scientific basis for further research and understanding of physical processes which are today only vaguely understood.

CHAPTER II. THEORETICAL BACKGROUND

A study of the subject of this thesis would not be complete
without adequate review of the field of fluid mechanics. With a
guide from the work of Bird, Stewart, and Lightfoot (B-15), a
summary of the basic fundamentals and current knowledge related to
the subject is present.

Viscosity

The chief physical property with which one deals with in
fluid dynamics is the coefficient of viscosity. Newton's law of
viscosity states that the viscosity of a fluid (gas or liquid) may
be defined as a constant of proportionality between the shear force
per unit area and the negative gradient of the local velocity,
and written as

$$\Upsilon = -\mu \frac{du}{dy} \tag{1}$$

Fluids which follow Newton's law of viscosity are known as
Newtonian fluids and are characterized by a linear relationship,
passing through the origin, when the shear stress, Υ , is plotted
against the velocity gradient, see Figure (1). However, there
are many fluids which do not follow the fundamental relationship
of equation (1) and these are referred to as Non-Newtonian fluids.
Of the many non-Newtonians, three provide useful classification
and are standard terminology in the field. See Figure (1).

The Bingham Plastic is a material which does not yield
until a finite shear stress Υ_o has been attained; after this
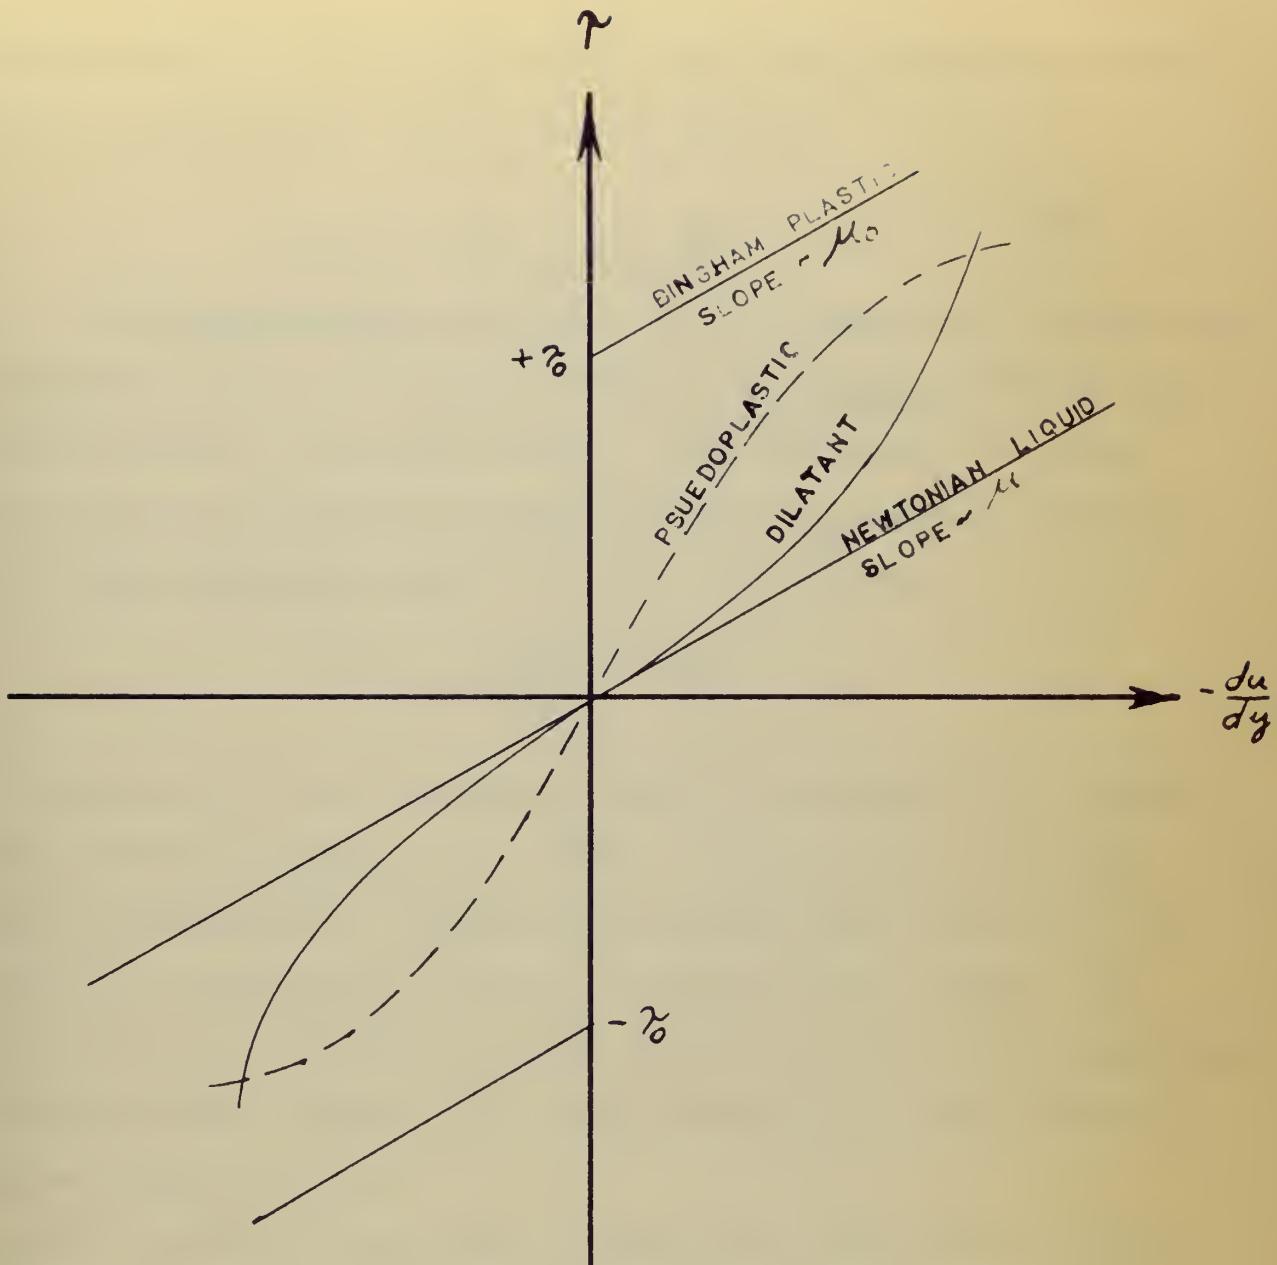
FIG. I — SUMMARY OF RHEOLOGICAL BEHAVIOR OF
NEWTONIAN FLUIDS & OF SOME NON —
NEWTONIAN MODELS (B-15)

shear stress is reached the fluid flows like a Newtonian fluid
with viscosity μ_o. This can be written as

$$\Upsilon = \pm \Upsilon_o - \mu_o \frac{du}{dy} \qquad (2)$$

The Pseudoplastic materials are those which seem to get less
viscous as they are sheared, whereas the Dilatant materials get
more viscous as they are sheared. Many substances of these
types may be represented approximately by a relation known as
the power function model which may be written as

$$\Upsilon = -m \left| \frac{du}{dy} \right|^{n-1} \frac{du}{dy} \qquad (3)$$

in which m and n are constants, where n represents the deviation
from Newtonian behavior and m may be likened unto viscosity.
Much information is lacking about non-Newtonian materials and
there is considerable need for research in this regard. Of
interest to the subject at hand, however, are two materials that
Metzner (M-15) reports data on the parameters m and n for the
power function model.
23.3% Illinois yellow clay in water, m = 0.116 and n = 0.229
54.3% Cement rocks in water, m = 0.0523 and n = 0.153

Fluid Flow

Fluid flow may be characterized as steady or unsteady,
uniform or non-uniform, and laminar or turbulent. If, at any
typical point, the velocity of successive fluid elements is the
same in both magnitude and direction at successive instants, the

flow is said to be steady. If, at any instant, the velocity of successive fluid elements along a typical stream tube is the same in both magnitude and direction, the flow is said to be uniform.

Flow in which the shear is characterized by basic relationship expressed in equations (1) and (2) has come to be known as Laminar or Viscous flow. Each such successive fluid layer or laminae remain distinct from one another and, thus, laminar flow can be graphically depicted as a series of non-intersecting flow lines. The basic relationship for laminar flow is known as the Hagen-Poiseuille law and is based on laminar incompressible flow in a tube. It is expressed as

$$Q = \frac{\pi \Delta p R^4}{8 \mu L} \tag{4}$$

Expressions for the average velocity, maximum velocity and drag force can easily be developed from equation (4). In addition, the expression can be modified to provide for other boundary shapes and for fluid areas. The assumptions which are implied in the development of the Hagen-Poiseuille law are:

a. Laminar flow - Re less than 2×10^3.

b. End effects neglected - the deviation from parabolic velocity profile and tube entry and tube exit is not important if the tube is more than 50 diameters in length.

c. Incompressible flow - the density ρ is constant.

d. Newtonian fluid.

e. Steady state flow (time independent).

f. No slip at wall.

g. Gravity effects are neglicted.

At this point it is well to define two groups of dimensionless numbers which are used repeatedly in engineering studies.

$$Re = \left| \frac{DV\rho}{\mu} \right| = \text{Reynolds number} \qquad (5)$$

$$Fr = \left| \frac{V^2}{gD} \right| = \text{Froude number} \qquad (6)$$

Reynolds number is characteristic of the type of fluid flow and is a measure of the relative importance of the viscous forces in the system. The Froude number is a measure of the relative importance of gravity forces in the system.

Most laminar flow problems can be solved by application of the equations of continuity, motion, state and viscosity as required. The _equation_ _of_ _continuity_ for a region $\triangle x, \triangle y, \triangle z$, fixed in space, through which a fluid is flowing can be expressed as follows:

$$\frac{\partial \rho}{\partial t} = -\left(\frac{\partial}{\partial x} \rho u + \frac{\partial}{\partial y} v + \frac{\partial}{\partial z} \rho w \right) \qquad (7)$$

This equation simply describes the change of density with respect to time at a fixed point in space, this change resulting from the changes in the various components of the mass velocity vector. More to the point, the equation states that there is a

conservation of mass in any differential element of volume within the fluid. For an incompressible fluid equation (7) reduces to the form of

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{w}{\partial z} = 0 \tag{8}$$

The equation of motion usually takes some form of the famous Navier Stokes equations which are listed here for constant ρ and μ. The <u>three</u> equations are of the form of

$$\rho \left(\frac{\partial u}{\partial t} + u\frac{\partial u}{\partial x} + v\frac{\partial u}{\partial y} + w\frac{\partial u}{\partial z} \right) = -\frac{\partial p}{\partial x} +$$

$$\mu \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 u}{\partial z^2} \right) + \rho g_x \tag{9}$$

The three equations of equation (9) obtain from a momentum balance. A general statement of a momentum balance is that within a small element of volume fixed in space the momentum per unit volume changes because of (a) the transport of momentum into and out of the fluid element by virtue of the bulk fluid flow, (b) the difference in pressure on opposite sides of the volume element, (c) the difference in shear stress on opposite sides of the volume element, and (d) the gravity force acting on the fluid contained within the volume element.

When μ is set equal to zero, equations (9) result in the Eulerian equations of acceleration. Dimensional analysis of

equations of continuity and motion lead to the formation of
Re and Fr. Also, it can be generally stated that application
of the previous equations to laminar flow provides an exact
description of the flow behavior, the only limitation placed
on the investigator is the complexity of the mathematical
solutions.

Turbulence

Once the fluid reaches a flow characteristic $Re \approx 2 \times 10^3$,
the laminar flow becomes unstable, eddies generated in the initial
zone of instability spread rapidly through the fluid, and the
additional disturbances which they themselves produce
eventually cause a disruption of the entire flow pattern. The
result is fluid turbulence. The major distinction between turbule
and laminar flow therefore lies in the existence of a complex
secondary motion superimposed upon the primary motion of trans-
lation (R-9). Since the average size of the turbulent eddies is
much larger than the length of the mean force paths of the molecul
making up the fluid, the fundamental equations developed for lamin
flow can be applied to turbulent flow on a quasi-empirical basis.
However, the strict application of the laminar flow equations
would give instantaneous velocities and pressures, which for the
random motion of turbulent flow, would give greatly varying
results. To avoid this difficulty the use of time-averaged or
temporal mean quantities are used in dealing with turbulent
flow. This procedure will lead to the turbulent momentum flux
(or shear stress) components which are often referred to as the
"Reynold's stresses".

Fluid flow does not change abruptly from laminar to turbulent flow, in fact, laminar flow may persist in a circular tube above Re = 2 x 10^3 by keeping the flow system free from vibrations or by keeping the tube surface free from scratches. Generally, any normal amount of surface or vibrational disturbances will cause the well-ordered laminar motion to give way to the random motion of the turbulent flow. This is true for the bulk of motion in the tube, however, right at the surface of the tube there usually remains a thin layer of fluid moving in laminar flow called the laminar sub-layer. The transition from laminar sub-layer to the zone of fully developed turbulence is not discontinuous and the region of transition between the two is called the "buffer zone". Thus, in considering turbulent flow systems, one is dealing with a complex system involving three regions which exhibit more or less distinct behavior (a) the laminar sub-layer, in which Newton's law of viscosity describes the flow, (b) the buffer zone in which the laminar and turbulent effects are both of importance, and (c) the region of fully developed turbulence in which purely laminar effects are of negligible importance. See Figure (2).

From the Hagen-Poiseuille law, equation (4), it can be established that for laminar flow in a circular tube, the velocity distribution is parabolic.   u and V are given by:
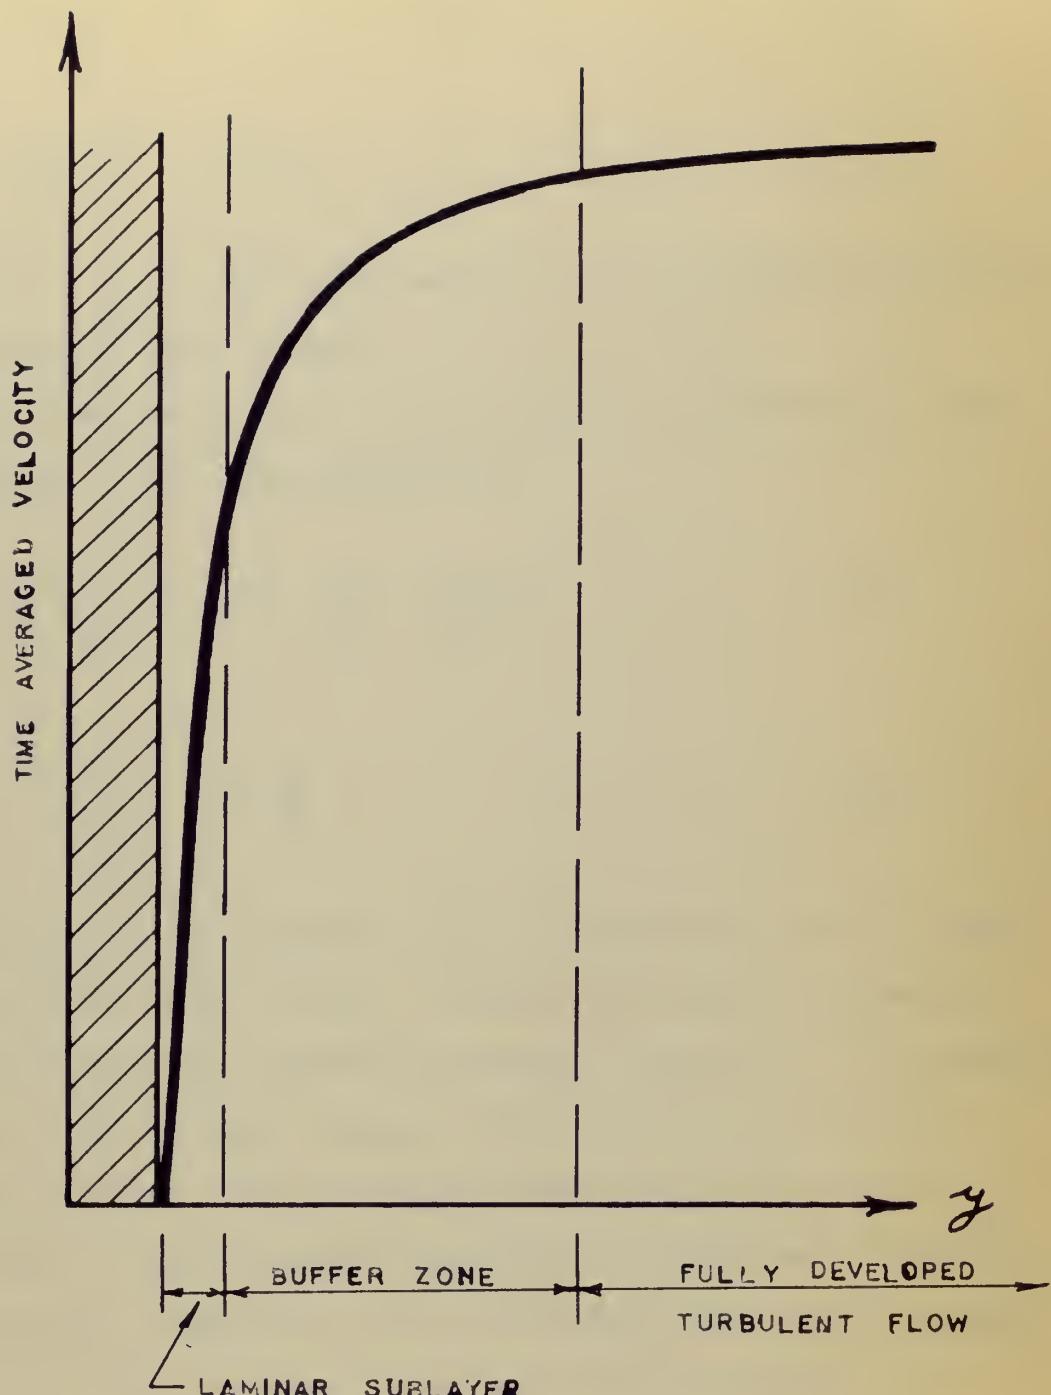
FIG. 2 — VELOCITY DISTRIBUTION FOR TURBULENT
FLOW IN TUBES — REGION NEAR THE WALL

(B-15)

$$\frac{u}{u_{max}} = \left[1 - \left(\frac{r}{R}\right)^2\right] \qquad (10)$$

$$\frac{V}{u_{max}} = \frac{1}{2} \qquad (11)$$

Also, it is seen that the pressure drop is exactly proportional to the volume rate of flow.

For turbulent flow it may be shown experimentally that $\bar{u}$ and $\bar{V}$ are given approximately by

$$\frac{\bar{u}}{\bar{u}_{max}} \approx \left[1 - \frac{r}{R}\right]^{\frac{1}{7}} \qquad (12)$$

$$\frac{\bar{V}}{\bar{u}_{max}} \approx \frac{4}{5} \qquad (13)$$

The corresponding pressure drop is proportional to 7/4 power of the volume rate of flow. Figure (3) shows a comparison of the laminar and turbulent velocity profiles. To be noted is that the empirical formula, equation (12), does not properly account for the regions near the tube surface. It is also evident that the empirical formula is of no value if one needs information about the drag force, which depends on the velocity gradient evaluated at the surfaces.

Reynolds sought to simplify the application of the laminar flow equations of motion and continuity (Equations 8 and 9) by substituting for every instantaneous velocity
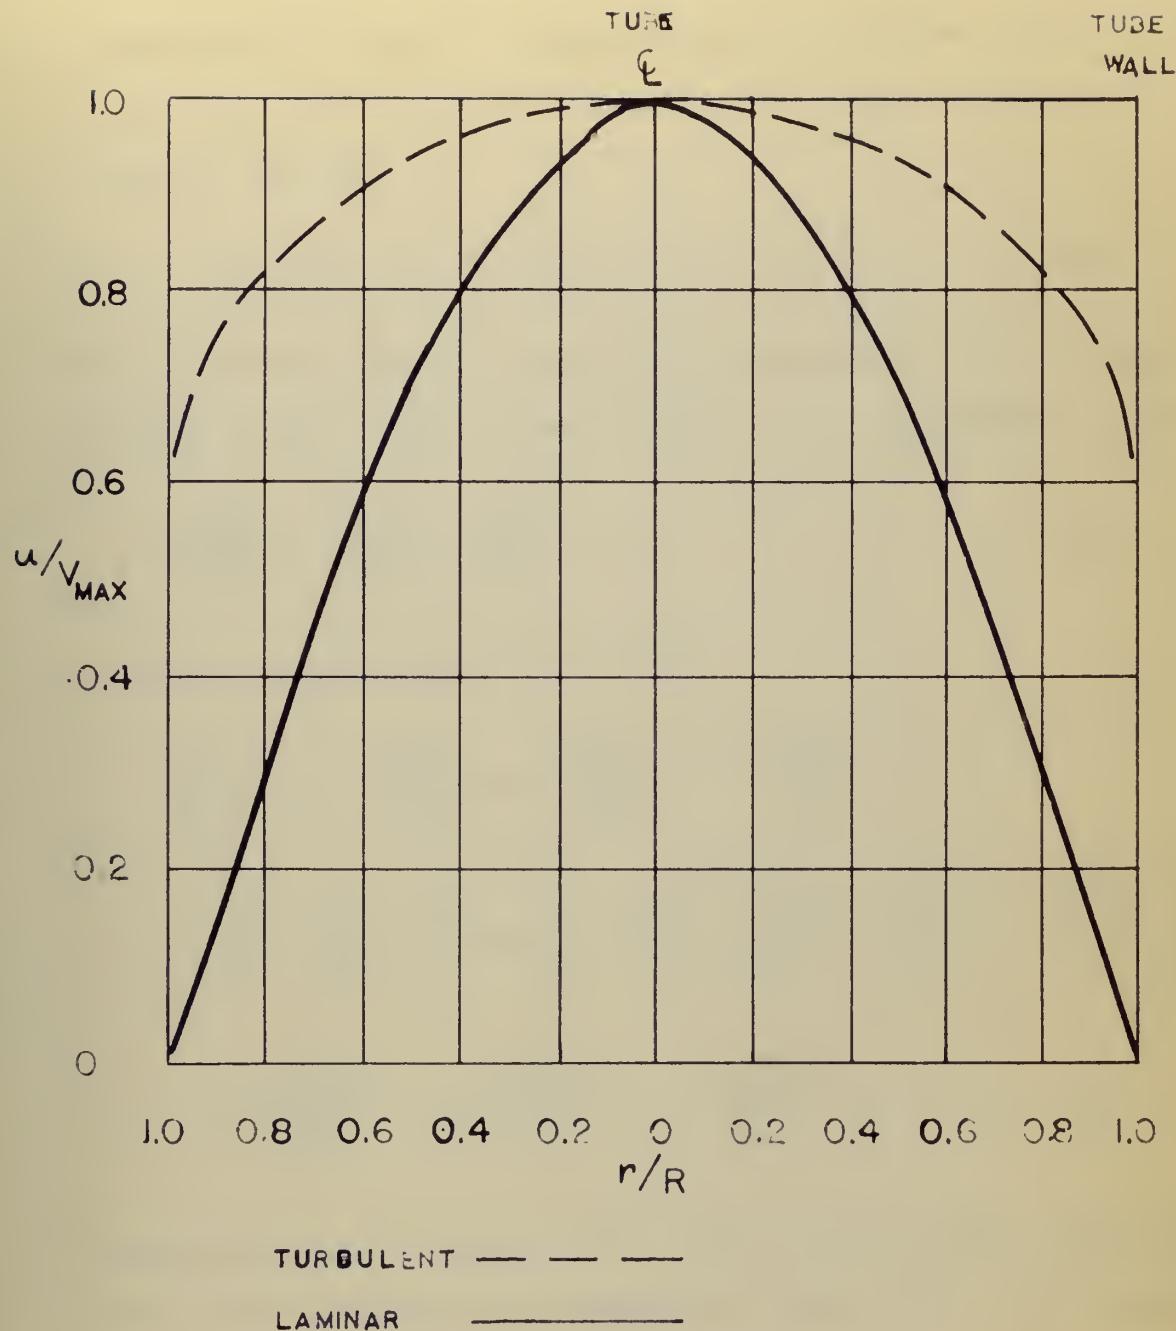
FIG. 3 - QUALITATIVE COMPARISON OF LAMINAR &

TURBULENT VELOCITY DISTRIBUTIONS (B-15)

component the sum of a temporal mean component (denoted by a bar) and the momentary departure therefrom (denoted by a prime); that is,

$$u = \bar{u} + u', \quad v = \bar{v} + v', \quad w = \bar{w} + w' \qquad (14)$$

Use of these quantities and the elimination of all terms having a mean value of zero results in a <u>continuity</u> equation

$$\frac{\partial \bar{u}}{\partial x} + \frac{\partial \bar{v}}{\partial y} + \frac{\partial \bar{w}}{\partial z} = 0 \qquad (15)$$

and three equations of the forms

$$\frac{\partial \bar{u}}{\partial t} + \bar{u}\frac{\partial \bar{u}}{\partial x} + \bar{v}\frac{\partial \bar{u}}{\partial y} + \bar{w}\frac{\partial \bar{u}}{\partial z} =$$

$$-\frac{1}{\rho}\frac{\partial}{\partial x}(\bar{p} + \rho z) + \frac{\mu}{\rho}\left(\frac{\partial^2 \bar{u}}{\partial x^2} + \frac{\partial^2 \bar{u}}{\partial y^2} + \frac{\partial^2 \bar{u}}{\partial z^2}\right)$$

$$-\frac{\partial \overline{u'u'}}{\partial x} - \frac{\partial \overline{u'v'}}{\partial y} - \frac{\partial \overline{u'w'}}{\partial z} \qquad (16)$$

Examination of equations (15) and (16) indicates that the effect of turbulence is embodied in the three mean products of the components of fluctuation.

From the above it can be shown that

$$\bar{\tau} = \mu\frac{d\bar{u}}{dy} - \rho\,\overline{u'v'} \qquad (17)$$

for steady, uniform turbulent flow in the x direction. (R-9)

The contribution of the turbulent motion to the local
shear depends on the magnitude of the mean product $\overline{u'v'}$.
Since, according to the definition of $\overline{u}$ the means of u' and
v' themselves must necessarily be zero, it is seen that the
mean product can have a finite magnitude only if the magnitude
of u' is to some extent related to the magnitude of v'.
Perfect correlation does not exist, however, measurements
of flow in a pipe with appreciable shear invariably results
in a finite correlation of sorts.

Beginning with the above analysis, several attempts
have been made to deduce expressions for the Reynolds
stresses. All are empirical in nature and most have been
attacked for one reason or another. However, since much
current theory of hydraulics embraces one or more of these
approaches, several are outlined below.

Boussinesq Eddy Viscosity Expression (R-9)

One of the earliest was proposed by Boussinesq who
drew a parallel between the molecular motion of laminar flow
and the molar or eddy motion of turbulent flow. The molecular
viscosity μ of a fluid is known to depend upon the density,
the velocity, and the mean free path of the molecules. There-
fore, it should be possible to introduce a molar or eddy
viscosity, η , which depends on the density, velocity, and

size of the eddies, such that (R-9)

$$\bar{\tau} = (\mu + \eta) \ \frac{d\bar{u}}{dy} \qquad (18)$$

This equation has little to recommend it because η depends strongly on position.

Prandtl's Mixing Length Expression (B-15, R-9)

By assuming that eddies move around a fluid very much as molecules move about in a gas, Prandtl derived an expression for momentum transfer in a fluid in which the mixing length ℓ plays a role roughly analogous to that of the mean free path in gas kinetic theory. This led to the relation:

$$\bar{\tau} = -\rho \ell^2 \ \left| \frac{d\bar{u}}{dy} \right| \ \frac{d\bar{u}}{dy} \qquad (19)$$

The mixing length ℓ is also a function of position; however, Prandtl achieved some success by letting ℓ be proportional to the distance from solid surface in the turbulent stream. A result similar to the above was obtained by G. I. Taylor's vorticity transport theory.

von Karman's Similarity Hypothesis Expression (G-7, D-10)

By means of dimensional analysis, von Karman deduced that the Reynold's stresses should have the form

$$\bar{\bar{\tau}} = -\rho K^2 \left| \frac{\left(\frac{d\bar{u}}{dy}\right)^3}{\left(\frac{d^2\bar{u}}{dy^2}\right)^2} \right| \frac{d\bar{u}}{dy} \qquad (20)$$

in which K is a universal constant whose value is given as
0.40 by some investigators and as 0.36 by others for tube
flow velocity profile data.

Deissler's Empirical Formula for the Buffer Region (D-10,D-11)

Deissler proposed the following empirical expression
for use in the neighborhood of the solid surfaces where the
von Karman and the Prandtl equations are inadequate:

$$\bar{\bar{\tau}} = -\rho n^2 \bar{u} y \left(1 - \exp\left\{- n^2 \bar{u} y/2\right\}\right) \frac{d\bar{u}}{dy} \qquad (21)$$

in which n is a constant determined experimentally by
Deissler as 0.124 from tube flow velocity distributions.

Use of the above theories can be summarized by indicating
the range of flow over which they are applicable. Deissler
in (D-10) and (D-11) reports excellent correlation and expands
the expressions into workable equations. Also, other useful
expressions have been developed considering the transport
of solids in water. The range of application for equations
(1), (2Q) and (21) best suited for each is as follows:

Equation (1)   - Laminar sub-layer - Newton's Law.

Equation (21) - Buffer region (and laminar sub-
layer) - Deissler's expression.

Equation (20) - Fully turbulent zone - von
Karman expression

Friction Factor Correlations

In flow of fluids through pipes, the engineer is
generally concerned with the relationship between pressure
drop and the volume rate of flow. Also, in transport problems
the relation between the velocity of the approaching fluid
and the drag force becomes highly important. In many systems
the velocity and pressure profiles cannot be calculated,
so the engineer has sought through experimental data and
correlations to relate pressure drop to quantity flow and
drag force to velocity.

In considering flow through a pipe or around an object,
the fluid will exert a drag force, F_D, on the solid surfaces.
This drag force is related to the area of the system exposed
and to the kinetic energy of the fluid stream, which may
be written as follows:

$$F_D = A(KE)f \tag{22}$$

where f is a dimensionless proportionality factor known as
the friction factor. For flow in a conduit, A is taken to
be the wetted surface and KE is taken to be the quantity

$\frac{1}{2} \rho V^2$. From which for flow in pipes of radius R, f may be defined by:

$$F_D = (2\pi RL) \quad (\frac{1}{2} \rho V^2)f \qquad (23)$$

Equation (23) can be written in terms of the pressure drop utilizing the cross-section area as:

$$\frac{\Delta p}{\frac{1}{2}\rho v^2} = \frac{L}{D} \cdot 4f \qquad (24)$$

This expression is a form of the Darcy-Weisbach equation which is fundamental to all hydraulics. Gravitational effects may be included by use of the expression

$$F_D = (\Delta p \pm \rho gL \sin \theta)A \qquad (25)$$

where θ is the angle of inclination to the horizontal.

By dimensional analysis and the use of the above and previous equations it can be shown that

$$f = \psi \, Re \qquad (26)$$

This is a fundamental and important relationship which provides that for turbulent and laminar flow at any velocity in pipes of any diameter for fluids of any density and viscosity, data can be correlated in a plot of f versus $\frac{DV\rho}{\mu}$.

Expressions for the dividing point or transition range between laminar and turbulent flow have been developed and are

Laminar

$$f = \frac{16}{Re} \qquad Re < 2 \times 10^3 \text{ stable} \qquad (27)$$

$$Re > 2 \times 10^3 \text{ unstable}$$

Turbulent

$$f = \frac{0.0791}{Re^{\frac{1}{4}}} \qquad 2 \times 10^3 < Re < 10^5 \qquad (28)$$

Many other expressions have been developed for the particular problem under study at the time. For the present, however, the relationships shown are sufficient to permit further advance into the thesis subject.

Figure (4) shows a typical plot of friction factor versus Re. It should be emphasized that the general data discussed thus far has been for smooth surface circular pipes. If the circular pipes are rough then in the turbulent region, higher pressure drops are required for a given flow rate than would be indicated by the solid line of Figure (4). If k is the height of the protuberances, then the "relative roughness" would be expected to enter the correlation expressed in equation (26). Additional data has been plotted in Figure (4) for various values of k/D. Roughness tends to make f a constant over wide ranges of Re.

Diffusion (R-9)

An interchange of fluid between two neighboring zones necessarily involves the simultaneous interchange of every local
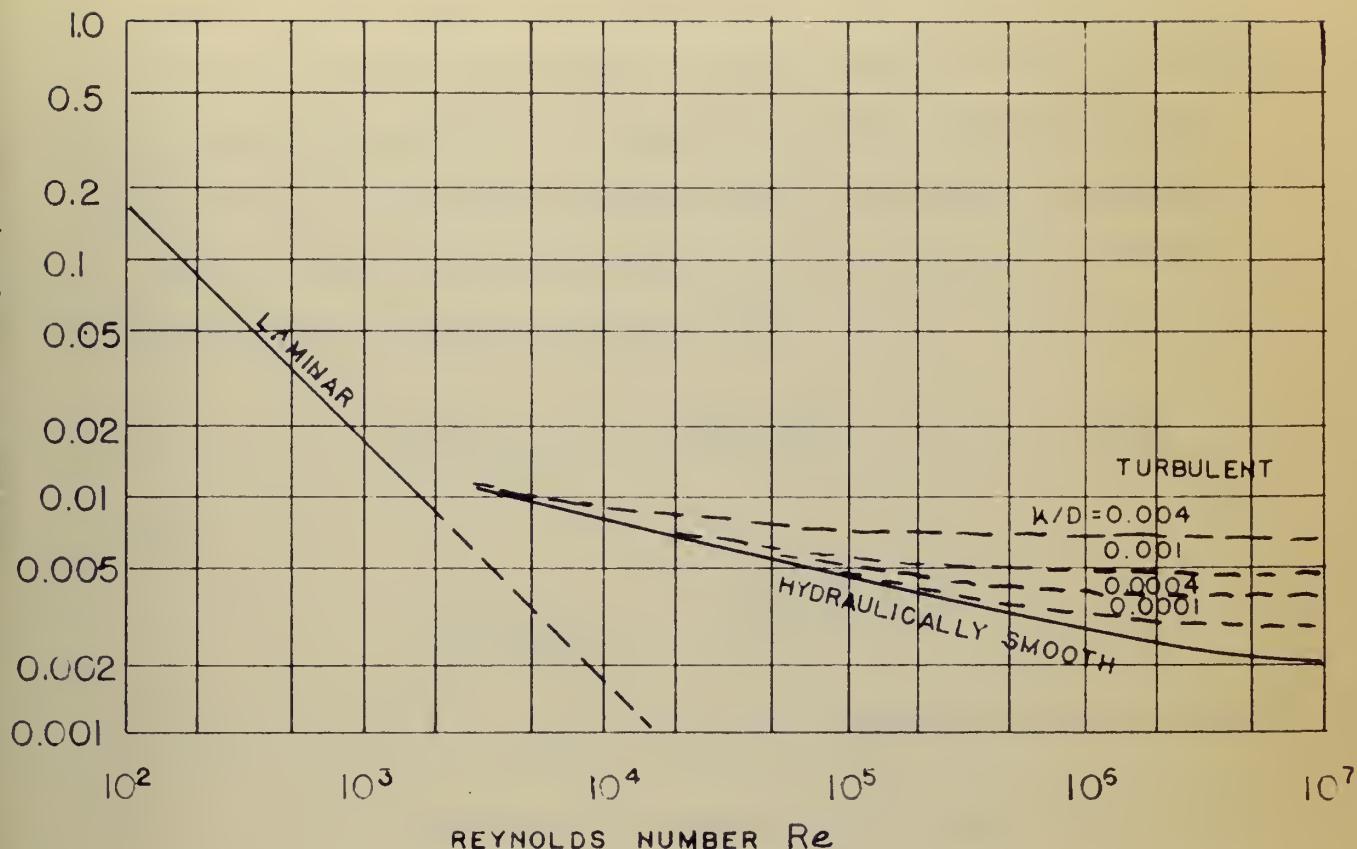
FIG. (4) - FRICTION FACTORS FOR TUBE FLOW (B-15)

characteristic which the fluid or flow may possess. The
actual rate of increase or decrease evidently depends
fundamentally upon two independent variables: the carrying
capacity of the cross flow, and the extent of the difference
of the characteristic in question between the two zones.
This can be expressed mathematically in terms of mixing
across a zone in which concentration of matter in either
solution or suspension varies, as

$$M_{laminar} = -\beta \gamma' \frac{dC}{dy} \qquad (29)$$

or

$$M_{turbulent} = -\beta \varepsilon \frac{dC}{dy} \qquad (30)$$

where ε is $\frac{\eta}{\rho}$, β is a proportionality factor, and M

is the rate of lateral transport. This relationship is of
fundamental importance in recent investigations of sediment
transport by water.

Transport of Solids by Water

It is generally considered that the turbulent effects of
flow are the mechanism by which solids are transported in a
water-solids mixture. In considering the problem, one finds
that most investigators have worked with fairly large
macroscopic particles which have a definitive settling velocity;
and they have worked with particles of a single size rather
than a truly wide range of particle size. In transporting

dredged solids, the particle size may range from minute
colloidal particles to large rocks 27 inches or more in their
major dimension. Analysis of the solids would seem to
indicate that there must exist a minimum particle size below
which all solids would remain in suspension for all practical
purposes. This colloidal material, it would seem, would then
contribute to physical, i.e., viscous property of the fluid.
Of course, in any discussion of this problem, it is quite
likely that the degree of solids concentration plays an
important part in the viscous portion of turbulent flow as
well as the turbulent eddy transport portion. At the other
extreme of particle size, it is usually found that these larger
particles are transported by turbulent transport in the leaps,
skips and jumps of a saltation regime along the bottom of the
channel or pipe.

It has also been found in most transport systems that
a concentration gradient of solid material exists in vertical
smooth pipe profile ranging from a maximum near the bottom
to a minimum approaching the top. Of interest is that most
horizontal smooth pipe profiles are reported as being a
uniform concentration of solids.

In addition to the above, other limitations should be
placed on the applicability of the solid-liquid transport
or sediment transport theory, as it is often called. Actually,
the items to be enumerated hereinunder are not necessarily

limitations as they may prove to be valid as a basis for operation of transport theory involving dredged solids. Assumptions, then, that most investigators state are:

a. Sediment water mixture is homogeneous.

b. The continuity equation

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

is applicable.

c. Sediment water mixture, in the limit case, is a homogeneous fluid of the Newtonian type.

d. Incompressible fluid.

e. Steady uniform flow.

Turning then to the actual development of the expressions for sediment transport, it is found that for turbulent flow equation (17) can be written as

$$\bar{\tau} = \rho\, u'v' \tag{31}$$

if the viscous effects are neglected as minor which is perfectly valid. Then resorting to equation (19) and assuming that $u' \propto \lambda \frac{du}{dy} \propto v'$ the following results:

$$\bar{\tau} = \rho \lambda'^2 \left(\frac{du}{dy}\right)^2 = \rho \left[\lambda^2 \frac{du}{dy}\right] \frac{du}{dy} \tag{32}$$

and

$$\bar{\tau} = \rho\, \varepsilon_m\, \frac{du}{dy} \tag{33}$$

The term, $\rho \ell^2 \frac{du}{dy}$ is called the "eddy viscosity", while

$\ell^2 \frac{du}{dy}$ is called the "momentum transfer coefficient", $\mathcal{E}_m$.

O'Brien (0-1) first introduced an equation for the distribution

of suspended sand in turbulent flow. By equating the rate

of upward transfer, $-\mathcal{E}_s \frac{dC}{dy}$ of suspended sediment

resulting from turbulent exchange and the rate of settling

ωC under gravitational force the following was obtained.

$$\mathcal{E}_s \frac{dC}{dy} + \omega C = 0 \qquad (34)$$

From Ismail (I-1), the following general development of the

transfer mechanism is set forth.

Von Karman (V-4) gave the analogy between the transfer

of mass or heat and the transfer of momentum. He demonstrated

that the coefficient of all these kinds of transfer should

have the same form. Later Sherwood and Woertz (S-2) found

that the transfer coefficient for water vapor in a turbulent

gas stream was not equal to the momentum transfer coefficient

$\mathcal{E}_m$, but that they seem to bear a constant relation to each

other. Other investigators disclosed that this approximation

can be assumed in heat transfer also. Therefor, it may be

assumed that $\mathcal{E}_s$ can be related linearly to $\mathcal{E}_m$:

$$\mathcal{E}_s = \beta \, \hat{\mathcal{E}}_m \qquad (35)$$

in which β is the coefficient of proportionality.

For two dimensional flow

$$\tau = \tau_0 \left(1 - \frac{y}{y_m} \right) \qquad (36)$$

in which τ_0 is the shearing stress at the boundary and y_m is the vertical distance to the maximum velocity, i.e., the plan of zero shear. Thus, equation (36) can be combined with equation (33) to give:

$$\varepsilon_m = \frac{\tau_0 \left(1 - \frac{y}{y_m} \right)}{\rho \frac{du}{dy}} \qquad (37)$$

The von Karman universal velocity defect law (B-3) is:

$$\frac{u - u_{max}}{u_f} = \frac{1}{K} \log_e \frac{y}{y_m} \qquad (38)$$

in which $u_f = \sqrt{\frac{\tau_0}{\rho}}$. Therefore, when $\frac{du}{dy}$ is evaluated from equation (38) and applied to (37), the result is:

$$\varepsilon_m = K u_f y \left(1 - \frac{y}{y_m} \right) \qquad (39)$$

and from (35)

$$\varepsilon_s = \beta K u_f y \left(1 - \frac{y}{y_m} \right) \qquad (40)$$

Equations (39) and (40), according to Ismail (I-1) give zero values for both ε_m and ε_s at the center of the channel.

Many investigators maintain that the transfer coefficients are not zero at the center, and therefore, the equations are not valid at this point. Von Karman (V-3) explained how these relations were derived from the assumption of similar flow pattern; then he stated that in the center part of a pipe the similarity assumption cannot be correct. Brooks and Berggren (B-4) showed how Prandtl tried to correct that region and how the experiments of Nikuradse gave definite values of ε_m at the center of the pipes in his experiments. They showed that two reasonable assumptions which can be made at the center are either to take ε_m as a constant according to Sherwood and Woertz (S-2) or to assume an error curve for ε_m. If ε_s is constant over a certain region, equation (34) can be integrated over that region to give

$$\log_e \frac{C}{C_a} = \frac{u\vartheta}{\varepsilon_s} (y - a) \qquad (41)$$

in which C_a is the concentration at any arbitrary reference level $y = a$.

If ε_s follows equation (40) in another region, equation (34) will integrate to give:

$$\log_e \frac{C}{C_a} = \frac{W}{\beta K u_f} \log_e \left[\left(\frac{y_m - y}{y} \right) \left(\frac{a}{y_m - a} \right) \right] \qquad (42)$$

or

$$\frac{c}{c_a} = \left[\left(\frac{y_m - y}{y} \right) \left(\frac{a}{y_m - a} \right) \right]^z \qquad (43)$$

in which $\quad Z = \dfrac{u_*}{\beta Ku_f}$

Vanoni (V-1) verified equation (42) and showed how well it fitted the experimental points in an open channel. He also showed that the existence of suspended load tends to suppress or damp out the turbulence causing a decrease in the value of K, the von Karman universal constant. Of importance is that $\mathcal{E}_s$ depends on the size of sediment in suspension. Fine sediment tends to make $\mathcal{E}_s$ greater than $\mathcal{E}_m$; coarse sediment has an opposite tendency.

As has been previously stated, the value of K is generally been reported as ranging from 0.36 to 0.40. However, Ismail (I-1) reports for sediment laden flow that K decreased to a low of 0.20 for a concentration of sand equal to 43 grams per liter of solution. The decrease of K reportedly is attributed to damping of the turbulence. Ismail further reports that β = 1.5 for 0.10 mm sand and 1.3 for 0.16 mm sand.

In summary, reported results indicate that equation (34), the basic equation for sediment distribution and plot of the distribution curve of $\mathcal{E}_s$ in a vertical profile of the channel can accurately define the concentration distribution of the

flow system. Practically, the difficulty in this procedure
is that K and β cannot yet be predicted from theory and
they must either be assumed or determined experimentally.
In spite of this, the developed theory of the sediment (solids)
transfer mechanism represents a definite advance in thinking
and procedure which should, with further practical research,
permit rapid evaluation of sediment transport.

Dimensional Analysis for Sediment Transport

It has already been noted that most of fluid dynamic
formulae and relationships presented are empirical in nature.
Exact rigorous solution of the problem of turbulent flow
cannot at present be made. This statement is even more to
the point for problems involving liquid-solids transport
phenomena. Empirical relationships are generally established
from experimental results. On the other hand, there are
correlations which have been established from purely deductive
analyses. It can be definitely stated that empirical and
deductive relationships are seldom reconciled without a
compromise.

Dimensional analysis has been used by many investigators
to provide equations which could then be examined in the
light of actual physical behavior of the flow system and
with real experimental data. An analysis of the problem of
sediment transport through pipes is given from the results
of Garde (G-1).

The variables entering the problem can be classified

into four categories.

    (A) Sediment

       ρ_s - Density of sediment

       d - Mean diameter of sediment

       σ_g - Geometric standard deviation

       S_f - Shape factor

    (B) Fluid

       ρ_w - Density of fluid

       μ - Coefficient of viscosity

    (C) Flow

       V - Mean velocity of flow

       J - Hydraulic gradient

       C_T - Average sediment concentration

    (D) Boundary

       D - Diameter of pipe

       S - Slope of pipe

       $\emptyset$ - Variable characterizing form

Of these variables only J and C_T are dependent. Their
functional relationship can be written as

$$\Psi_1 \left(\rho_s, \ d, \ \sigma_g, \ S_f; \ \rho_w, \ \mu, \ V, \ C_T, \ J, \ D, \ S, \ \emptyset \right) = 0 \qquad (44)$$

Garde drops σ_g and S_f as not significant for his experiments.
Then, selecting ρ_w, V and D as repeating variables, and

applying the π theorem gives

$$J = \psi \left(\frac{\rho_s}{\rho_w} , \quad \frac{d}{D} , \quad \frac{VD/\mu}{\rho_w} , \quad \frac{v^2}{gD} , \quad c_T, \quad \frac{\emptyset}{D} \right) \quad (45)$$

Also, since for all the data used in Garde's work, sediment with specific gravity of 2.65 was used and the continuous medium was water $\frac{\rho_s}{\rho_w}$ was constant. Hence,

$$f = \frac{J}{\frac{v^2}{2gD}} = \psi \left(\frac{d}{D} , \text{ Re, } c_T, \frac{\emptyset}{D} \right) \quad (46)$$

In the phenomenon of surface resistance in pipe flow, it has been found that a dimensionless parameter $\text{Re}\sqrt{f}$ is very significant. Since the relative thickness of the laminar sub-layer in a pipe (i.e., the ratio of the thickness of laminar sub-layer to pipe radius) is inversely proportioned to $\text{Re}\sqrt{f}$, according to Garde (G-1) it is logical to assume that $\text{Re}\sqrt{f}$ may also play a significant role in sediment transport through pipes. The functional relationship for $\text{Re}\sqrt{f}$ may be expressed as

$$\text{Re}\sqrt{f} = \psi \left(\frac{d}{D} , c_T , \frac{\emptyset}{D} \right) \quad (47)$$

If E (W-6) is defined as energy required for transporting a unit weight of sediment per second per foot of pipe, then a functional relationship between the different variables

will be of the form of

$$E = \Psi' \left(W, \frac{\emptyset}{D}, Re, \frac{d}{D} \right) \qquad (48)$$

where W is the rate of sediment transport in pounds per second. Note should be taken of the fact that the expression above is a dimensional equation since it contains a dimensional parameter W, the sediment discharge in weight per second.

Thus, dimensional analysis has shown that, in studying the problem of sediment transport through pipes, the significant parameters will be: J, $\frac{\rho_s}{\rho_w}$, $\frac{d}{D}$, C_T, $\frac{v^2}{gD}$, Re, $\sqrt{f}$, $Re\sqrt{f}$ together with the parameter describing the boundary form. These parameters together with their combinations should be adequate to solve problems, such as influence of total sediment load on the resistance coefficient.

CHAPTER III. REFERENCE STUDY

A reference study has been made of the subject matter
of this thesis. In this study much use has been made of
condensed versions of reference material written by other
authors where verified by the present author. No attempt
has been made to list the references studied in any kind of
subject order, rather a chronological sequence has been
adhered to.

It should be pointed out that the reference study by
no means represents all of the material available for reference.
An examination of the bibliography, which is a part of this
thesis, provides an even greater reference listing.

Maltby (M-4) 1905, reported on the results of friction
loss investigations on the discharge lines of eight dredges
of the Mississippi River Commission. The dredges operated
on the portion of the river below the junction of the
Mississippi with the Ohio, at Cairo, Illinois. Tests were
made from 1896 through 1905. With the sediment all in
suspension, apparently in smooth pipes about 24 inches in
diameter, the friction factor, f, was found to be about
0.015. Specific conclusions were not presented.

Blatch (B-7) 1906, appears to have been one of the first
to give the problem of sediment transport in pipes the

consideration it deserves. Tests were made to determine
the head loss along a pipe 27 feet long with a 1 inch nominal
diameter. A 1.0546 inch diameter brass pipe, transporting
sands of about 0.60mm and 0.20mm median sieve diameter, and
specific gravity of 2.64 was studied. Also examined was a
1.0420 inch diameter galvanized iron pipe carrying 0.60mm
sand. It was demonstrated that, for a given total sediment
load, head loss deviated further and further from the clear
water head loss curve as the mean velocity decreased.
Defining the "economical velocity" as that at which the head
loss due to a given mixture of sand is a minimum, it was
concluded that the economical velocity for a 1 inch pipe
was 3.5fps. Furthermore, it was observed that there existed
a transition in the regime between 3.5 and 4.0fps. The
transition increased in length with an increase in grading
of the material. For fine and uniform sediment, the transition
zone is narrow.

Orrok and Morrison (0-4) as early as 1921 made estimates
on the economic practicability of pumping anthracite and
bituminous coal as far as 320 miles. Excluding water costs,
all the estimates were equal to or less than 3 mills per
ton-mile for pumping 6 million tons per year.

Clifford (C-12) 1924, attempted to analyze the flow of
sewage sludge by an analogy with the laws of viscous fluid

flow. A kinematic viscosity for the sludge was determined by comparing the flow of the sludge containing 90% moisture to the flow of glycerine. This comparison was made with a 5/16 inch diameter tube, 5.25 inches long. Applying the kinematic viscosity determined as given above, theoretical friction losses were computed for an 8 inch line, at Calumet, Illinois, pumping sludges containing 90% water. Calculations checked with the measured friction losses.

Cramp (C-11) 1925, set up a design criteria for pneumatic conveyors. Plants were classified as pressure, suction, or a combination. The factors to be considered were the pressure differential, the sediment-pipe friction, the air-pipe friction, the force to support the material, the force to support and accelerate the air, and the force to accelerate the material. A very lengthy equation involving all the above factors is given for the case of vertical pipes. It is stated that a modification of the equation would be applicable to horizontal lines. Measurements and circulations differed less than 4%. Horsepower was computed by using isothermal compression.

Gregory (G-2) in 1927 determined the head loss when pumping a slurry through a horizontal 4 inch pipe. Losses due to fittings were also evaluated. The test line was about 250 feet long. The sediment was made up of 70% (a little sand)

clay, 24% carbonate of lime, and 6% hydrate of magnesia and
hydrates of iron oxide. The material ranged from colloidal
to microscopic in size and did not settle quickly nor cake
in the pipe. Plotting J versus V, it was found that above
a certain velocity the plot agreed with that of clear water,
with total loads ranging from 5 to 29% by volume. (18.6
to 35.3% by weight.)   For lower velocities, of a particular
total load, the head loss remained constant. The maximum
velocity for which J was independent of V, for a constant
load, was named the "critical velocity". It was also the
most economical velocity in terms of power consumption.

Mikumo, Nishikara and Takahara (M-6) wrote a paper in
1933 on their tests of pipeline head loss with copper ore slimes
pumped through a 1½ inch pipeline. The ore had an average
specific gravity of 3.5. The median size of the material was
0.0042 inch. The equipment consisted of a recirculation
system powered by a centrifugal pump. The length of the
horizontal test section for measuring pressures was 1 meter.
Methods for the measurement of velocity and concentration are
not adequately explained.

Brautlecht and Sethi (B-9) 1933, presented data on head
loss in a horizontal 1 inch pipeline transporting unbleached
sulphite pulp. The pulp was screened through a No. 10 flat
screen. Concentrations were 0 to 1.57% by bone dry weight.

The pipe plugged at a concentration of 3%. Velocities ranged from 2.0 to 8.8 fps.

Thoenen (T-2) discussed in 1936 the advantages and disadvantages of pipeline transportation of sand and gravel. An example of typical pumping performance curves and a list of the characteristics of mixtures are given. Included also are friction losses for fittings and some dredge pipeline data.

Traxler (T-4) 1937, pointed out that the flow properties of dilute suspensions of clay and other minerals depends to a large extent on particle size, size distribution and shape. It was concluded that there is a simple relationship between the concentration of solids and the viscosity of the suspensions.

O'Brien and Folsom (O-2) 1937, published one of the classic papers on the subject of pipeline sediment transport. They ran a series of tests with 2 inch and 3 inch standard black wrought iron pipe. The pipelines were horizontal. Three sizes of sand were used, ranging from about 0.0065 inch to 0.050 inch median size. A sand and water mixture was circulated, and concentration, hydraulic gradient and mean velocity were measured. In analyzing this data it was found that the Darcy-Weisbach equation $J = fV^2/2gD$, where g is the gravitational field, was valid for non-homogeneous mixtures as well as for homogeneous fluids. Two minimum velocities were defined: (1) a "critical velocity", at which

the head loss begins to differ appreciably from the head
loss for clear water in the same pipe, and (2) the velocity
of incipient clogging. It was concluded that the critical
velocity was a velocity below which a part of the material
was transported by rolling along the pipe and as the velocity
is decreased, more and more area of the pipe becomes obstructed
by the rolling sand until conditions of incipient clogging
occur. Furthermore, the most efficient velocity for pumping
a given total load is the minimum velocity that will move the
material through the pipeline, which was independent of sand
size for the range reported. In a discussion of the effects
of solids on the turbulent flow, they believed the concentration
of the material might not be the same across horizontal surfaces
because the particles tend to fall to the lowest point,
including a double spiral secondary flow, downward at the
center and upward along both sides.

Wilhelm and others (W-1) 1939, published friction loss
data on the pumping of cement rock and filter-gel suspensions.
Horizontal pipes 0.75 inch, 1.5 inch and 3 inches in diameter,
27 feet long, were tested with water sediment complex. A
reasonable correlation of all these data was obtained on an
f-Re diagram by substituting an apparent viscosity, determined
with a rotating viscosimeter, for the fluid viscosity.

Howard (H-6) 1939, studied the transportation of sediment
through 2 inch and 4 inch pipes. The length of pipes under test

was about 14 feet. The following sediments were tested:

Commercial Name	50% Size mm	Classifications
Pea Gravel	2.50	Medium Gravel
Pearl River Sand	0.40	Medium Sand
Laboratory Loess	0.024	Silt
Buck Shot	0.001	Clay

The quantities measured were pressure loss, sediment concentration, and velocity. Important conclusions drawn from these tests are as follows:

a. There are three distinct ways in which sediment is transported through pipes: by rolling when the velocity is small; by jerking when the velocity is medium; and by the motion of all the particles over the entire cross-section of the pipe when the velocity is large.

b. For pipes carrying sand, f decreases with an increase in velocity.

c. Values of f will increase with an increase in solids concentration for any given velocity.

d. Economic velocity for transporting solids depends upon the character of sediment to be carried, and each class of sediment will probably have a different economic velocity for the same size of pipe.

e. A very fine sediment should be transported with much less head loss than large sediment.

f.   Extension of results from a small pipeline to
a pipeline of greater diameter must be qualitative and not
governed by any law of corresponding velocities.

Durepaire (D-7) 1939, in the discussions of Howard's
paper (H-7) described the results of tests carried out at
Nantes Harbour. The inside diameter of the pipe was 2.05 inches
and Loire River sand with a maximum grain size of 0.30mm was
used. The results can be summarized as follows:

a.   With all the sediment load in suspension and
within the range of concentration encountered in the experiment
(up to 40% by volume), the head loss expressed in feet of
mixture was the same as that for clear water, irrespective of
concentration, except at the state when deposition was impending.

b.   Cirtical velocity (i.e., velocity at which
deposition begins for a given concentration) and economic
velocity (i.e., velocity at which head loss is minimum for a
given concentration) occur approximately at the same velocity.

c.   No jerking motion of the sediment was observed.

d.   It was found in the partial deposition phase that
for a constant concentration of sand, head loss is greater when
total discharge decreases. At the same time the height of
deposited sediment increases. The deposit of sediment in a given
run was of rather uniform depth because there was no jerking
motion.

Durepaire (D-16) 1939, in a contribution to the study of
sediment pumps, carried out a complete and clear analysis of
stability in sediment-water mixture transport lines. Hydraulic
gradient was plotted versus discharge of mixture for various
arbitrary total loads, giving a typical curve in which there
always exists a minimum head loss for each total sediment load.
A hypothetical pump characteristic curve was superimposed on the
J-V diagram. The stability of the plant operation, which decrease
the probability of pipeline clogging, was presented for any
pump having a Q equal a constant characteristic, and conversely.

Wood and Bailey (W-7) 1939, presented the research done
on transportation of sand and linseed sediments by air in
horizontal pipe of 2.9 inch diameter and 25 feet long. The
data was taken in the range where the sediment moved in saltation
and it was found that head loss is a linear function of C_T.

Caldwell and Babbitt (B-6) wrote a paper in 1939 on the
laminar flow of sludges. Experiments were with 1 inch, 2 inch,
and 3 inch horizontal pipes carrying sewage sludge. It was con-
cluded that clay slurries and sewage sludges behave as true
plastics; and therefore, a yield stress and a coefficient of
rigidity were necessary to describe the "fluid", in place of
viscosity used for a Newtonian fluid. The yield stresses and the
coefficient of rigidity were independent of the diameter and
roughness of the pipe in which they were measured, but did depend

on the concentration of suspended material, size and character
of sediment particles, nature of the continuous phase, temperature,
thixotropy, slippage, aggitation and gas content of the sludge.

Chatley (C-8) 1940, discussed the elements of power
consumption in the transport of granular solids in suspension.
The significant ones are lifting the solid particles, accelerating
the grains, sustaining the grains, friction against the pipe
walls, accelerating the fluid, fluid friction, and losses at
the bends and valves. Sample calculations were presented for
a 6 inch pipe, 50 feet long, transporting 48 tons of grain per
hour. Air was used as the fluid. The computations indicated
that roughly three times as much horsepower is required for
horizontal transport of grains as for vertical conveyance. The
major portion of the difference in power seemed to be due to
the higher power requirement in the horizontal pipe needed to
accelerate the grains. It was thought that slope is a significant
variable in pneumatic transport when it deviates from the vertical

Howard (H-7) presented, in 1941, one of the few papers on
large artificial roughnesses placed in a pipe for the purpose
of improving sediment carrying capacity. In order to determine
optimum rifling, loss tests were run on a 4 inch 20 gage steel
pipeline, carrying water and 0.39mm sand from the Pearl River.
It was determined that the length of rifling should be 1/3 the
pipe length. One of the best riflings consisted of the above

length, with three riflings spaced at 120 degrees around the
pipe and having a pitch of 10 diameters. The roughness height
was D/8, where D is the pipe diameter. A similar rifling was
installed in a two inch pipe and tests made with the same sand.
It was hoped in this manner that a design could be made for
pipes of 30 to 32 inches. Using the optimum rifling, head loss
tests were made using 0.023mm silt and 2.48mm pea gravel. The
conclusion was reached that rifling will increase the efficiency
of plants pumping coarse sand and gravel, for the range of
velocities customarily used, but will decrease it for silt and
clay; i.e., efficiency will be increased for any material large
enough to settle and travel along the bottom of the pipe. If
the velocity becomes sufficiently high when transporting a
given material, the energy loss due to the rifling may over-
shadow the decrease of energy consumption due to the induced
suspended flow, and a decrease in efficiency will result.

Danel (D-5) in a discussion of Howard, pointed out that a
density gradient in a pipeline could cause a damping of turbulence,
just as density variations with height causes the calmness of the
atmosphere at sunset. He also mentioned the importance of the
size of the material in this phenomenon. If the particles are
coarse, their continued falling through the fluid creates the
turbulence and there is little chance that density variation can
reduce turbulence to the point where the head loss is less than
that for water at the same velocity.

Caldwell and Babbitt (B-6) reported in 1941 on the extension
of the laminar flow tests of 1939, with sewage sludge, to the
turbulent regime. New standard black steel pipe 0.5 inch, 1 inch,
2 inch, and 3 inches in diameter was employed. Except for the
0.5 inch pipe, the test reach was 21 feet long preceded by at
least 40 pipe diameters for establishing the flow pattern. The
friction loss was measured for several velocities with each of
the eight sludges tested. In analyzing this data it was found
that a diagram of f versus Re = $VD\rho/\mu$ was adequate to solve
friction loss problems when the velocity was greater than a certain
magnitude. For velocities less than this, the hydraulic gradient
deviated appreciably from that for clear water in the same pipe.
Another important conclusion was that, for sludges composed of
water and suspended material, the viscosity of the dispersion
is nearly the same as that of water, so that the common hydraulic
formulas can be used in evaluating turbulent flow friction losses
when pumping sludges.

Wilson (W-5) proposed an elementary theory in 1942 of
pipeline transport of non-colloidal inert solids, assuming that
the particle settling velocity relative to the transporting
fluid is known. A relationship was written between the work done
by the liquid on the particles and the decrease in potential energy
of a settling particle. Using the Darcy-Weisbach equation and
assuming the energy gradient may be divided into two parts, the
result of the energy calculation was the equation:

$$J = \frac{fV^2}{2gD} + \frac{\gamma_s - \gamma_w}{\gamma_w} (1 + A_1) \frac{C_T \omega}{V}$$

for the hydraulic gradient when sediment was being transported, where γ_s and γ_w are the unit weight of the sediment and water respectively. The fall velocity of the sediment particles is ω and A_1 is a constant. By assuming C_T, ω, f, A_1, and D constant, a condition for deposition was derived. The condition is $\omega/\sqrt{JgD/4} = 1$ for horizontal pipes. That actual cases would differ from this, due to non-uniform values of shear over the cross-section, was recognized.

Wilson (W-6) 1945, analyzed the data taken by Blatch, Howard, and others. This produced the dimensionless parameter to describe the energy required for sediment transport:

$$E = \frac{J}{\frac{C_T}{100}} = \text{Energy required per foot of pipe per pound of sediment transported.}$$

His analysis of the data led to the following general conclusions:

a. Since E is proportional to J/C_T, the most efficient transportation of sediment through pipes, as far as energy required is concerned, is when C_T is a maximum, for a given amount of sediment to be transported.

b. A limit to the above statement is the point beyond which one cannot decrease the discharge for given solids

of a particular size without clogging the pipes.

c. Analysis of Howard's data (H-7) for pipe with rifling showed that with a given quantity of mixture flowing, more energy per unit mass of the solids transported is required to transport a small solids load than a large solids load.

Vanoni (V-1) 1946, published results of the experiments conducted by him on transportation of suspended sediment by water in a Flume 33.25 inches wide and 60 feet long, the slope of which could be adjusted. The experimental sediment distribution in the vertical was compared with the theoretical distribution. The formula

$$\frac{C}{C_a} = \left[\left(\frac{D_1 - y}{y} \right) \left(\frac{a}{D_1 - a} \right) \right]^{Z_1}$$

was obtained on the assumption that ε_s and ε_m are equal. His conclusions are summarized as follows:

a. The distribution of relative concentration of suspended load is given by the above equation, but the value of Z_1 given by the theory does not agree with the value of Z_1 that fits experimental data.

b. The above disagreement is attributed to the action of random turbulent fluctuations in suspended sediment and "slip" between the fluid and the sediment as the sediment is

accelerated. This makes ξ_s differ from ε_m.

    c. For fine material, ξ_s tends to exceed ε_m; for coarser material the opposite tendency is found.

    d. Suspended load decreases the value of K, which characterizes the effectiveness of turbulence in transferring momentum. Reduction of K means the mixing is less effective and would indicate that the sediment tends to suppress or drop out the turbulence.

Vogt and White (V-2) 1948, published a paper on "Friction in the Flow of Suspensions-Granular Solids in Gases Through Pipes". Friction losses were studied in 0.50 inch pipe carrying sand sizes 0.0088 inch, 0.0138 inch, 0.0018 inch and 0.0287 inch; steel shot 0.0165 inch; clover seeds 0.046 inch; and wheat 0.158 inch in diameter. Both horizontal and vertical pipes were used. Using $(J - J_e)/J_e$ as a significant parameter it was found that

$$\frac{J - J_e}{J_e} = A_1 \left(\frac{D}{d}\right)^2 \left[\frac{\rho_a}{\rho_s} \cdot \frac{q}{Re}\right]^{A_2}$$

where A_1 and A_2 are constants and q is the ratio of solids to air.

Danel (D-12) presenting some theoretical considerations in 1948, again put forth the concept of "evening calm" with respect to a flow having a marked density gradient. It was concluded that the amount of energy dissipated in maintaining the sediment in suspension was about equal to the decrease in energy

dissipation due to the damping of the turbulence, i.e., the
total head loss for a mixture is approximately the same as that
of a fluid of the same average density. The concept of a plastic
film near the wall was postulated for the transport of very fine
materials. This is the usual laminar sub-layer, into which the
sediment has diffused until the layer is plastic in character.

Hariu and Molstad (H-5) in 1949 described the experiments
in vertical glass tubes of 0.267 inch and 0.532 inch diameters.
The object of investigation was to study the effect of gas
velocity and concentration on pressure drop. The sediment sizes
used were Ottawa sand 0.00165 feet and 0.00117 feet; sea sand
0.00090 feet and 0.0070 feet; micro-spherical cracking
catalyst 0.00036 feet; and ground cracking catalyst 0.00036 feet.
The pressure drop was divided into that due to a gas alone when
no sediment is present, that due to friction loss from contact
between sediment and pipe, and that due to solids-static loss.
The solids-static loss was described as the pressure drop in
the gas due to supporting dispersed solids in the given length
of vertical tube.

Farbar (F-1) 1949, in studying the flow characteristics
of the solids-gas mixtures in horizontal and vertical pipes,
used a 17mm tube with material ranging from 8 microns to 220
microns in diameter. It was found that at large concentrations
there was a tendency for the pressure drop to be independent of

concentration. He also found that the flow characteristics of solids-gas mixtures in which size distribution covers wide ranges, differ considerably from mixtures of narrow size range.

Durand (D-13) reported in 1951 on the hydraulic transport of gravel and pebbles. The material was sieved into categories between the following limits: 2.3mm - 5.25mm - 9.9mm - 15.5mm - 20mm - 25mm. A 104mm horizontal pipe was used for the tests. The head loss varied with total load for all the gravels studied, but seemed independent of the mean diameter of the grains. Furthermore, for a given velocity in the range usually found in hydraulic conveying work, the head loss was higher than that for clear water. A classification of "sand" sediments was proposed, based on the characteristic plot of head loss versus velocity plot for each class. The classes are: (1) silts and fine sands which follow Stokes Law, (2) coarse sands, and (3) gravels and pebbles that follow the Rittinger Law. This classification emphasizes the significance of the parameter w^2/V.

Durand (D-14) discussed in 1951 some experimental work on the pumping of fine ashes from a power plant. The material covered a wide size range, 2 to 100 microns, with a specific gravity of 2.5. The pipeline was 250mm in diameter. Total load was as high as 300 grams per litre. It was felt that due to the heterogeneity of the sediment, no precise conclusions

could be made until additional data on screened sediments were
made available.

Collins (C-14) in 1951 provided a paper which gives a
practical, though empirical approach to the operation of
hydraulic dredge pipelines. His paper included the report of
a study of several months duration on the dredge Marshall C.
Harris in 1934 and 1941. The results of the investigation are
reported in the form of a summary problem. Complete data or
physical operating characteristics are not presented. Collins
states that the following rules are applicable to hydraulic
dredging.

1. The pump capacity (gpm) passing through the pump is
directly proportional to the speed (rpm).

2. The total pressure (psi) developed by the pump varies
as the square of the rpm of the runner.

3. The horsepower (bhp) required will vary as the cube
of the speed.

4. The pressure developed by the pump runner will increase
in proportion to the specific weight of the fluid.

5. In a pipeline the pressure head loss due to turbulence
and friction varies as the square of the velocity of the fluid.

6. In a horizontal pipeline and when the velocity is
sufficient to keep the solid particles in homogeneous suspension,
the friction loss varies directly as the specific weight of the
fluid.

Collins also states that the nature of pipeline flow can
be considered to have three distinct stages. The first when the
resistance to flow is caused by clear water only. The second
stage occurs when the solids are homogeneously suspended. The
third stage must be considered a phenomenon, and when it occurs,
the line resistance can increase 100% over that of the first
stage in a few seconds.

Collins also points out that the absolute accuracy of
Rules 1 to 6 might be questioned by various hydraulic experts
and it may even be well to concede a possible deviation of from
5 to 10% in the anticipated ratings of the pump.

Contained in the analysis presented by Collins is a complete
outline for computing dredge pipeline capacity, velocity, pump
characteristics, etc.

Soleil and Ballade (S-11) carried out tests in 1951,
reported in 1952, on the Nantes dredging operations. Head loss,
rate of material transport and depth of deposit in 580mm and
700mm pipes were measured. The test section was about
100m long, horizontal and located at the end of the main dredge
discharge line. Conclusions were that the pipe diameter ought
to be chosen as large as possible in order that the width of
deposit represents a considerable part of the pipe diameter.
The larger pipe had the lesser head loss and carried more
sediment per cubic foot of discharge than a smaller pipe
with equal mixture discharge. The head loss was very sensitive

to sediment size. Material over 0.3mm affected the head loss, but material less than 0.3mm diameter did not influence it.

Tison (T-5) wrote in 1952 on tests with a chemical plant residue of about 0.05mm which was pumped through 1 inch and 2 inch diameter pipes. Concentrations by volume of 15 and 30% were used. Head loss was measured in feet of water because the specific gravity was always less than about 1.15. The sediment reduced the resistance coefficient f considerably, at least for Re numbers greater than 10,000.

Ward (W-10) in 1952 published his doctoral thesis on the flow of air-water-clay and water-clay mixtures through 3/4 inch, 1 inch and 1½ inch nominal size copper pipes. The solid material used was Kaolin clay with specific gravity ranging from 2.45 to 2.51 at 25°C. An average value of 2.48 was used. Average particle size was approximately 5 microns.

The pressure drop increased at a fixed flow rate linearly with increasing amounts of solids up to the higher concentration. It then increased rapidly with small increases in solids concentration. This indicates that at the higher concentrations the flow properties of the suspensions are changing rapidly. Sample concentrations were produced which behaved as pseudo-plastics and Bingham plastics.

Ward also concluded, after examination of the "turbulent viscosity" that the usual Newtonian-friction factor Reynolds number relationship is approximately true for water-clay suspensions

and the turbulent viscosity computed from this relationship has
no valid significance.

Craven (C-2) 1952, presented the results of studies at the
University of Iowa with 60 feet lengths of 5.5 inch ID and
nominal 2 inch diameter plastic tubes. Tests were run with three
grades of uniform quartz sands (9.25mm, 0.58mm, and 1.62mm).
The slope of the tube could be varied at will. By dimensional
considerations, it was demonstrated that the bedload transport
could be adequately described by two dimensional relations. The
experiments were designed to determine these functional relation-
ships. The investigations were not sufficiently extensive to
attain the original objective, but certain interesting observations
were made. It was found that the bed configuration, for each of
the sands, evolved through the same pattern but the value of C_T
at which a given change occurred was different for each grain
size. It seemed that the higher the value of $V/\omega y'$, the greater
was the tendency for sediment to be lifted into suspension and
the less the tendency for it to travel by dunes. If the actual
shear values are for greater than critical in the open channel
flow, the majority of the bed load equations take the form

$$J \propto \frac{\Delta \gamma}{\gamma_w} (C_T)^n$$

where n varies from 1/2 to 2/3. It was found that a similar
relation holds good for pipe flow, the equation taking the form

$$J \approx 0.606 \; \frac{\gamma_s}{\gamma_w} \; (C_T)^{2/3}$$

Ambrose (A-2) 1952, extending the research of Craven (12)
with the same basic equipment, investigated the case of free
surface flow in pipes. Two relationships to define the phenomenon
of sediment transport were derived by dimensional analysis:
(a) a transport function relating the discharge to the geometry
and to the other characteristics of flow, channel, and sediment,
and (b) a discharge function relating the discharge to the
resistance to flow of the sand bed and the pipe wall. Analysis
of this data indicated that the transport function appears to be
dependent solely upon the main geometry. No discernable effect
due to d/D was evident. It was found that the transport function
reached a maximum value of approximately

$$2.9 \; (\gamma_s / \gamma_w - 1)^{2/5}$$

Deposition would not occur for values of the total load greater
than this. The parameter γ_s / γ_w was constant. The discharge
function seemed adequately defined if k/D and Re were neglected
(k is an equivalent uniform sand roughness).

     a. Transport function

$$\frac{\dfrac{Q}{D^2}}{\left(\dfrac{\gamma_s}{\gamma_w} - 1\right)^{\frac{2}{5}} \; Q_s^{\frac{1}{5}} \; g^{\frac{2}{5}}}$$

which is dependent on Re, γ_s, y/D, y_s/D, d/D and K/D where y and y_s are the depths of flow and sand bed respectively. Q_s is the absolute volume rate of transport.

b. The discharge function

$$\frac{Q}{g^{\frac{1}{2}} \; s^{\frac{1}{2}} \; D^{\frac{5}{2}}}$$

depending on the same parameters described above.

Head (H-11) 1952, working in the paper engineering field with non-Newtonian fluids of pulp and sulfite, introduced terms to replace the dynamic viscosity which is strictly applicable only for Newtonian fluids. The shear diagram was a straight line with a non-zero intercept for zero shear over the range investigated. This led to defining the physically meaningful "slope viscosity" as the slope of the shear diagram. An "apparent yield stress" was defined as the intercept on the shear diagram when the shear was zero. A "shear criterion" was introduced for non-Newtonian suspensions.

Kostlichor (K-2) 1952, studied head loss in a 101.6mm
cast-iron pipe 61m long transporting very fine sediment.
Specific gravity of the mixture ranged from 1.00 to 1.28. As
in earlier investigations, it was found that the head loss curve
corresponded to that of clear water for velocities greater than
a value depending on the total head. In this case the asymptotic
curve was determined after the tests had been completed, and a
very smooth coat of sediment covered the pipe roughnesses. This
coating reduced the resistance about to that of hydrodynamically
smooth pipe.

Dougherty (D-6) made a survey, reported in 1952, on the
problems presented by the pipe transportation of coal by
water. After reviewing the opinions of manufacturers of
centrifugal sand pumps, and some economic studies available in
the literature or files of manufacturers, the conclusion was
reached that coal could be transported economically in pipelines,
especially in large tonnages. Further conclusions were that,
before coal pipelines could be built, much more pumping performanc
data is needed, pumps need more development, data on errosion
of pumps is lacking, and data on the most economical linear
pumping velocities and pressure drop must be determined for
various coal mixtures.

Ismail (I-1) published a paper in 1952 on the studies
conducted in a rectangular pipe 10.5 inches wide and 3.0 inches

deep. The conduit was 40 feet long. Sediment was recirculated. Sands having sedimentation diameters of 0.16mm and 0.10mm were used. Measurements were made of the discharge, velocity profile, concentration profile and head loss along the conduit. The analysis of data was based on considerations of the effect of the sediment on f, $\ddot{\mathcal{E}}_s$, $\mathcal{E}_m$, and K. Conclusions were:

a. The von Karman constant K decreases when the total load in suspension is increased. Both of the sands used in the experiments have nearly the same effect on K, which decreased to as low as 0.20 when C_T was 43 grams per liter.

b. The change in K does not follow the change in concentration from point to point over one cross-section, but it varies from section to section maintaining a constant value over each section.

c. The value of $\mathcal{E}_m$ is affected by the presence of sediment only through changes in K.

d. The Darcy-Weisbach resistance coefficient, f, is not affected by the pressure of sediment up to a point where sediment load is great enough to form dunes; then f becomes greater than that for clear water.

e. The sediment transfer coefficient $\mathcal{E}_s$ is approximately equal to $1.5 \mathcal{E}_m$ for the 0.10mm sand and $1.3 \mathcal{E}_m$ for the 0.16mm sand.

An independent analysis by Laursen and Lin reported in the

discussion, led to converse conclusions, i.e., K was not adequately defined to permit reliable conclusions, sediment has little or no effect on the flow, and the proportionality between $\mathcal{E}_s$ and $\mathcal{E}_m$ is equal to or less than unity.

The Bureau of Yards and Docks (B-2) published a technical publication in 1953 on dredging. This manual emphasizes that the character of material has a marked effect on the digging and pumping ability of the dredge. Also, the length of pipeline more or less governs the pipeline velocity, and a change in length will therefore have its effect on dredge output. It is pointed out that the economical pumping radius for any hydraulic dredge varies greatly with the class of material to be handled.

It is further stated that pipeline friction losses vary about as the square of the velocity. It also varies greatly with the character and weight of the materials being pumped. The Bureau recommends the use of $\dfrac{A_3 V^2}{D}$ as the friction loss caused by moving a mixture through the pipeline. The factor A_3, which is a constant for any given material at a fixed velocity but changes with the change in character of the solids, is an inverse function of the velocity. V represents the pipeline velocity in fps, and D the inside diameter of the discharge line in inches. It is also noted that when solids are being carried, there is a critical velocity below which the friction loss increases very rapidly.

The dredge output in cubic yards of solids per hour can be computed from

$$C_T = \frac{A_2 V^a D^b}{J^c}$$

in which A_2 = a variable, depending on the character of the solids being pumped

        V = pipeline velocity in fps

        D = pipeline diameter in inches

        J = the total head

        a, b, and c = established constants

The correct determination of the factors A_3 and A_2 rests primarily on the judgment and experiences of the designer. No data is given for the constants a, b, and c.

Durand and Condolios (D-2) presented a very complete paper in 1953 on the hydraulic transport of sediments having a specific gravity of 2.65. Nine categories of sediment, from very fine sand to pebbles, were studied in four conduits of 40.6mm to 250mm diameters. Total sediment load varied from 50 to 600 grams per litre. Using a whistle meter for discharge measurements, it was found that for non-deposit regime and concentrations less than 20% by volume the manometer reading was not affected by the presence of sediment. Also, for fine sands in high velocity flows the presence of the material did not have an appreciable influence on the value of the head loss expressed in terms of

clear water, i.e., the presence of the material was not
detectable on a metallic manometer. The head loss for muds
was found to be the same as that for water in turbulent flow,
if the head was expressed in height of mixture. For analysis
of the fine sand and coarser material transport, it was found
that the Gasterstadt relative head loss $(J - J_e)/J_e$
was a significant variable and related to the transport
concentration by $(J - J_o)/J_e C_T = \Theta$
where Θ was to include V, D, d, etc. It was decided that for
sediments having a sieve diameter d greater than 2mm, with a
given velocity V, the head loss is independent of the sediment
dimensions. The term J_e is the hydraulic gradient for the pipe
transporting clear water under the same V as the corresponding J.
In constructing Θ, it was determined empirically that, for d
and D a constant, $\Theta = \Theta(V)$. If D were varied, $\Theta = \Theta (V/\sqrt{gD})$.
With both d and D variable, Θ became

$$\Theta = \Theta ((V^2/\sqrt{gD}) (\sqrt{gD}/w))$$

All those data for fine sand or coarser material transported
entirely in suspension, by water, were correlated by

$$A_2 (\sqrt{gD}/V)^3 (w/\sqrt{gD})^{1.5}$$

where A_2 is an empirical constant.

The study also revealed the necessity for classifying
the sediment mixture according to grain size into homogeneous

and heterogeneous classes. The complete classification suggested is:

    a.   Homogeneous mixtures: clays, fine ash, and very finely powdered coal (up to 20 to 30 microns).

    b.   Intermediary mixtures: silts (25 to 50 microns)

    c.   Heterogeneous mixtures:

        1.   Heterogeneous mixtures transported by suspension - fine sand, powdered coal, and slurry (from 50 microns to 0.2mm).

        2.   Transitions category: coarse sand and fine gravel coal (0.2mm to 2mm)

        3.   Heterogeneous mixtures transported by saltation; gravels, pebbles, and lumps of coal (above 2mm).

Chamberlain (C-10) 1955, studied the internal mechanism of sediment transport with 0.20mm sand sediment using 12 inch diameter smooth, helical corrugated, and standard corrugated pipes. Concentration profiles were taken along the vertical and horizontal diameters. Some of his conclusions were:

    a.   The Darcy-Weisbach resistance coefficient, for a given boundary was not significantly affected by the presence of fine sand until the total load of sediment increased to a magnitude which caused deposition to take place in the pipe.

    b.   The Darcy-Weisbach resistance coefficient

decreased with increasing Re and seemed to follow the Karman-Prandtl resistance equation for turbulent flow in smooth pipes, as long as all of the sediment was in suspension.

c. The mean velocity, at which deposition started, became less dependent on the magnitude of the total load as velocities were increased.

d. The horsepower input required to maintain a certain discharge of sand-water mixture was not materially greater than that necessary to pump the sand discharge of water, as long as all the sediment was in suspension. Horsepower was computed in terms of the discharge of mixture, with the unit weight and head loss expressed in feet of water.

e. Defining the point of most efficient operation as the minimum point of a constant total load curve on a J-V diagram and assuming operation at this point, helical corrugated pipe transported more sediment per unit time for a given horsepower than corrugated, and more than smooth pipe provided the total load was fairly small.

f. Helical and corrugated pipes delivered more sediment for a given mixture discharge than did smooth pipe. The smooth pipe required a higher mixture discharge than did the helical or plain corrugated pipes in order to maintain the same constant sediment discharge.

g. The horizontal concentration profiles were constant over a horizontal diameter of the smooth pipe.

h. The standard deviation of the sediment sieve

diameter affected the lower portion of the profile in the smooth
pipes.

   i. An absolute criterion for determining incipient
deposition was presented. The criterion for incipient deposition
is the maximum or rapid decrease (whichever is applicable) of a
C_a/C_T versus $C_T^{\cdot}$ plot for a given distance above the bottom of
a pipe and for a constant mean velocity.

   j. $\mathcal{E}_s$ had a much different distribution, as a
function of distance from the boundary, in a smooth pipe than
in a corrugated pipe.

   k. The Karman K in the Rouse number Z_1 was
below 0.4 in smooth pipe. Concentration profiles deviated
considerably from the Rouse equation.

   l. The energy balance between the rate of energy
dissipation required to maintain fine material in suspension
and the decrease in the rate the fluid consumes energy seems
to take place on the level of large scale energy transport
eddies, and not to materially affect the small scale energy
consuming turbulent eddies.

   m. The difference, if any, between the energy required
to transport a sediment laden fluid and an equal discharge of
the homogeneous continuous phase is a function of the amount
the sediment causes the piezometric head to deviate from a
constant over any cross-section normal to the direction of the
mean velocity.

Morris (M-5) 1955, proposed a new concept of flow in rough conduits based on tests conducted in 1954. Three basic types of flow: (1) isolated roughness flow, (2) wake-interference flow, and (3) skimming flow were postulated. Corrugated surfaces satisfy the wake interference type of flow, and the resistance coefficient f is given by

$$f = \left\{ \frac{1}{2 \log_{10} \frac{r_o}{2} + 1.75 + \frac{1}{\sqrt{2}} (2.5 - \delta) \frac{\beta \lambda}{r_o}} \right\}^2$$

where β is a coefficient in $y = \beta \lambda$, y is the distance from the roughness crest to the breakpoint between the wall and the core velocity profiles. The length λ is the logitudinal spacing of the roughness elements and the r_o is the radius of the pipe axis to roughness crest. The dimensionless function δ approaches 2.5 as β goes to zero with increasing velocity.

The resistance function

$$\frac{1}{\sqrt{f}} - 2 \log_{10} \frac{r_o}{\lambda}$$

will approach the same constant value 1.75 for all types of roughness elements, with increasing $\frac{Re \sqrt{f}}{\frac{r_o}{\lambda}}$. However, before this value of 1.75 is reached, the resistance coefficient increases with Re. It was also shown that Morris' equations can

be extended to surfaces of variable roughness by using the
average values of the roughness dimensions.

Garde (G-1) 1956, published a master thesis which reports
an extension of the testing undertaken by Chamberlain (C-10)
at Colorado A & M. Garde's work presents a thorough study of the
field of "Sediment Transport Through Pipes". His experiments
were conducted with 0.60mm median diameter sediment flowing in
water through 12 inch diameter smooth, helical corrugated, and
standard corrugated pipes. The work of previous investigators
is adapted and applied to his results. Garde summarizes as
follows:

1. In the range of Re in which experiments were carried
on, for clear water flow, the standard corrugated and helical
corrugated boundaries behaved as hydrodynamically rough, while
in the smooth boundary, the laminar sub-layer still covered the
surface irregularities, and hence, it was hydrodynamically smooth.

2. For 0.60mm size sediment, presence of sediment
always made the hydraulic gradient greater than that for clear
water at the same velocity.

3. For helical corrugated pipe, the limit deposit
velocity was a function of sediment concentration.

4. Helical corrugated pipe required nearly the same
discharge of water sediment mixture to transport a given discharge
of sediment of 0.60mm median size as sediment of 0.20mm median

size. For the same sediment discharge, standard corrugated
pipe required more water discharge for 0.60mm size sediment
than for 0.20mm size sediment. In the use of smooth pipe no
conclusive results were obtained.

5. For each of the three boundaries - smooth, helical-
corrugated, and standard corrugated - it was found that, for
a given sediment discharge, increasing the size of the sediment
resulted in greater energy requirements per foot of pipe per pound
of sediment transported.

6. For a given size of sediment and a given sediment
discharge, helical corrugated pipe required the least amount
of energy per foot per pound of sediment transported; standard
corrugated required the most energy.

7. Durand's equation did not fix the data collected
from various sources, to an acceptable degree of satisfaction.

8. For reasons given in (1), f for clear water
was constant with respect to Re for helical corrugated and for
standard corrugated pipes. For smooth pipe f decreased with
increase in Re and the Karman-Prandtl equation,

$$\frac{1}{\sqrt{f}} = 2 \log_{10} Re \sqrt{f} - 0.80$$

for turbulent flow in smooth pipes was found adequate to estimate f

9. In each of the three boundaries, f increased with
increase in C_T, for a given Re. In both the suspended load regime
and deposition regime, it was found that the equation

$$Re \sqrt{f} = \left[\frac{I}{\frac{d}{D}} \right]^{S_1} C_T^{1/3}$$

was adequate to give variation in f due to variation in d, D, and C_T for smooth pipes.

      10. Sediment movement on the bottom of the pipe is quite comparable to the sediment movement on the bed of an alluvial channel.

    Garde concluded that:

      1. In the helical-corrugated boundary, the water-sediment discharge necessary to transport a given discharge of sediment is not affected by the size of the sediment from 0.2mm to 0.60mm diameter sediment.

      2. Considering the aspect of energy requirement for transporting a given quantity of sediment, of a given size, helical corrugated pipe is the most economical.

      3. The resistance coefficient f is adequate to study the flow of water-sediment mixture through all the three boundary forms studied in the regime of suspended load and in the regime of deposition.

      4. The resistance coefficient f is affected by the sediment concentration and the characteristics of sediment and boundary form.

      5. There is a need to investigate further the parameter relating the sediment size to the size of pipe; with

some ingenuity it may be possible to form a parameter different from

$$\left[\frac{I}{\frac{d}{D}} \right]^{S_1}$$

which will be more significant.

Chien (C-1) in 1956 presented an excellent paper which reviewed the status of sediment transport. The paper brought together in most of the experimental work and study that has been accomplished. The bibliography of this reference is an outstanding source of material.

While much of the paper deals with alluvial channel flow, parallel analogy can be drawn forth to apply to the closed channel conduit case of this thesis. Portions of Chien's paper are briefly set forth below.

A. Grain Resistance

The frictional resistance of sediment grains at the bed surface can best be described by the logarithmic formula based on the similarity theorem of von Karman. The average velocity, V, of the flow in the vertical direction may be given by the equation

$$\frac{V}{(R_b' \, Sq)^{\frac{1}{2}}} = \frac{2.3}{K} \log_{10} \left(12.27 \times \frac{R_b'}{d} \right)$$

in which x is a corrective parameter for the transition from

smooth to rough and is itself a fraction of d/δ (δ being the thickness of the laminar sub-layer); x is unity for a hydraulically rough bed; K denotes the von Karman universal constant of turbulent exchange; and d is the representative grain size of the bed material.   d has been variously recommended as the D_{65} and D_{90} size. In the above R_b' is the hydraulic radius of the grain resistance and S is the energy slope. To be noted is that transport is occurring both as suspended matter and as so-called "bed load" solid matter.

Of particular interest is the collection of data and discussion of the Karman constant K. In general, values are reported less than 0.4 ranging from 0.20 to 0.38. Chien states that a change in K means a change in velocity distribution. It can be shown that the theory of suspension yields only the concentration distribution of the suspended sediment, and the rate of suspended-load transport is determined by integrating the product of the local velocity and concentration from the surface of the bed layer up to the water surface. If velocity distribution changes, one should determine what causes the change and how the change can be predicted. The controversy over the possible reason for the change of K must be settled if further progress toward a general solution of the sediment transport problem is to be made.

From his discussion of the work of several authors, Chien concludes that (a) the sediment motion affects the velocity

distribution and (b) if the roughness changes K, the roughness element must be so pronounced that its height becomes comparable with depth of flow. The presence of the heavy fluid zone near the bed is very important in the following respects. When the turbulence generated at the bed in the heavy fluid zone enters the light fluid zone, the momentum exchange may become less effective due to the reduction of mass of the exchange flow. In the heavy fluid zone, part of the shear may also be transmitted to the boundary through the sediment particle in motion. These two effects, in combination with the decrease in turbulence level because of the energy spent in keeping sediment in suspension are all accounted for by a reduced value of K.

Chien also shows the result of a plot of the rate at which frictional energy is spent per unit weight of fluid and per unit of time in supporting the sediment in suspension versus K. Finally, a reduction of K from 0.4 to 0.2 does not mean that the average velocity of the sediment-laden flow will be twice that of the corresponding sediment-free flow. Evidently, the equation of von Karman given above is no longer adequate in describing a sediment-laden flow. The development of a new equation on velocity distribution must wait until the effect of heavy sediment concentration near the bed becomes better understood. It is believed, however, that the difference in average velocity between the sediment-laden flow and the sediment free flow will not be appreciable.

B. Sediment Transport Rate

Sediment has been divided into bed load and suspended

load according to the difference in the mode of movement and in the laws that govern its motion, and into bed-material load and wash load according to the difference in the source of material.

1. Suspended Load - Suspended load is the material moving in suspension in a fluid, being held up by the upward component of the turbulent current. Distribution of the relative concentration of suspended load is of the form set forth by Vanoni (V-1) and Rouse (R-9)

$$\frac{c}{c_a} = \left[\left(\frac{D_1-y}{y}\right)\left(\frac{a}{D_1-a}\right)\right]^Z$$

with $Z = \frac{\omega}{KV_o}$ (V_o = shear velocity at the wall). Hunt (H-12), taking into consideration the space occupied by the sediment particles, introduced a more exact distribution function as follows:

$$\left(\frac{c_y}{1-c_y}\right)\left(\frac{1-c_a}{c_a}\right) = \left\{\left[\frac{1-\frac{y}{D}}{1-\frac{a}{D}}\right]^{\frac{1}{2}}\left[\frac{B_s-(1-\frac{a}{D})^{\frac{1}{2}}}{B_s-(1-\frac{y}{D})^{\frac{1}{2}}}\right]\right\}^Z$$

in which B_s is a constant that was found to be slightly smaller than unity. The above equations have been shown to describe the suspended-sediment distribution extremely well, except that the value of the exponent Z does not agree with Z_1, the exponent

that fits the measured data reported by Vanoni and others (V-1). Vanoni (V-1) and Ismail (I-1) proposed that

$$Z_1 = \frac{\omega}{\beta K V_o} = \frac{Z}{\beta}$$

and Hunt proposed

$$Z_1 = \frac{\omega}{B_s K_s V_o} = \frac{ZK}{B_s K_s}$$

No detailed explanation has been given as to what basically causes the difference between Z and Z_1 and what determines the value β or $B_s K_s / K$.

Einstein and Chien (E-4) revised the suspended load theory as follows:

a. The difference in sediment concentration at the vertical distance ℓ apart, ℓ symbolizing the mixing length of the turbulent flow, is expressed by $\ell \, dC_y/dy$ only for fine particles. For coarse particles the sediment distribution is highly skewed, and the higher deviating terms of the concentration C_y with respect to the vertical distance y have to be included.

b. It is unrealistic to assume that the turbulence eddy maintains its identity until it travels a certain distance, ℓ, and only then begins mixing. The model of the turbulence eddy is rather to be visualized as if the fluid carried by the eddy continuously mixes with the surrounding fluid on the course of the traverse of the eddy. However, the process of mixing is

much more active near the origin of the eddy than at points farther away. In other words, the mixing length is assumed to follow a certain probability distribution instead of possessing a finite value.

c. Because the turbulence is generated at the bed and dissipated toward the water surface, the characteristics of turbulence are not necessarily symmetric. In other words, for an upward flow and a downward flow originating from the same point, the mixing length and fluctuating velocity of the upward flow might not be the same as those of the downward flow.

Much work has been done in investigating the suspended load of fine particles, but very little has been done on the investigation of coarser materials. The suspended load theory breaks down near the bed where the particle size is of the same order of magnitude as the size of the eddies around the particle. The particle merely settles down between eddies without being lifted up again by the surrounding fluid masses. The thickness of the bed layer in which suspension becomes impossible has been found to be about two grain diameters. Within this layer, the particles are pushed forward by the flow. Their weight is no longer supported by the flow but by the bed itself, and the motion of the particles may be described as rolling, sliding, and jumping. This part of the load is usually called the bed load.

2. Bed Load - Much attention has been given in recent years to the transport of sediment via bed load movement. Chien

reviews several of the well-known formulae that have been developed. Full treatment of these formulae is beyond the scope of this thesis. However, it should be pointed out that practically all equations that have been developed for bed load theory are actually of compatible form and consist of the same parameters.

Evaluation of Total Load

The rate at which particles of a given size are picked up and placed in suspension is therefore, proportional to (a) the ralative number of these particles in the bed (b) the magnitude of the vertical turbulent velocity components which are present and capable of picking them up and (c) the percentage of time during which velocities exist that are capable of causing the fluid to pick up particles of that size.

The transport rate of suspended load is determined by integrating the product of local velocity and sediment concentration from bed layer up to the water surface. Knowing the rates of transport of suspended load and bed load, the total sediment discharge moving across the section is merely the sum of the two.

CHAPTER IV.   CONSIDERATIONS AND ANALYSIS

In the writing of this thesis, a major effort has been
directed toward the accumulation of data and written material
through a reference survey. In this chapter, an effort is made
to centralize and correlate the information obtained; and, where
possible, focus it on the problem areas as set forth in the
Introduction, Chapter I. It will be apparent to the reader
that there is some divergence of opinion on the governing
physical criteria concerning the transport of solids by
pipeline. The author will attempt an "educated guess" or
postulation where such is deemed appropriate. However, for
the most part the data, analysis, and commentary are source
material plainly referenced as such. Division of this chapter
into sections is accomplished by setting forth the various design
and/or investigation approaches to the analysis of pipeline flow
with water-solids mixture.

Plots of Hydraulic Gradient, J versus Average Velocity V.

A study of J:V plots can provide information
regarding both the resistance coefficient and the energy
expended in maintaining the flow. An examination of Figure (5)
shows how V and J vary with various concentrations and for
three different boundary conditions. The slopes of each curve
is two with the exception of that of the smooth pipe which is
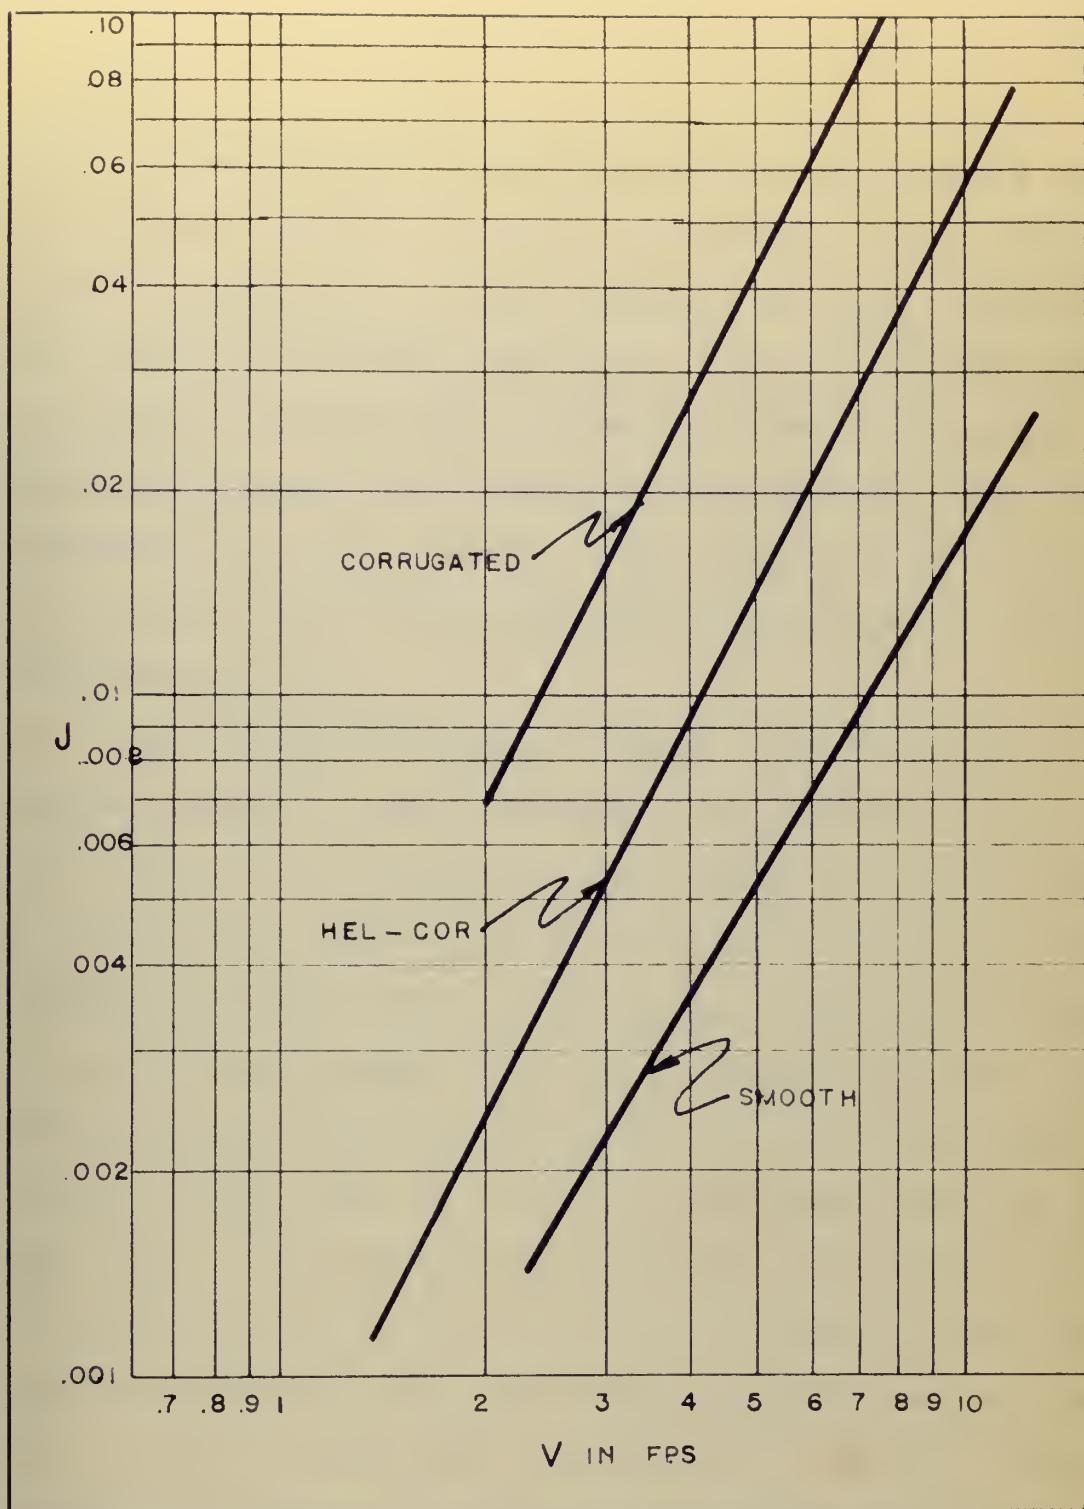less than two. In the case of corrugated and helical corrugated

FIG.(5)— VARIATION OF HYDRAULIC GRADIENT WITH

VELOCITY & CONCENTRATION (C-IO)

pipe, hydrodynamically rough boundaries are provided and the
so-called quadratic resistance law applies, i.e., the energy
loss is proportional to the square of the mean velocity. In
the case of the smooth pipe there is still a laminar sub-layer
covering the protrusions so that the boundary is hydro-
dynamically smooth and the viscous effects are sufficiently
pronounced to cause a slope of less than two. The first term
of equation (17) is the difference, since equation (32)
follows from (17).

In a pipeline flowing with pure water, the J:V plot will
appear similar to the clear water line plotted in Figure (6)
for a smooth circular pipe. When solids are added to provide
a solids-water mixture, the J:V plot with curves of constant
concentration superimposed thereon takes the form of Figure (6).
A line AB can be drawn on the plot which delimits the zone
of the regions with and without the deposit in the pipe. It
is also evident that it is in close agreement with the minimum
head loss. The velocity corresponding to the point at which
the flow passes from one to the other region has been named
the "economic velocity", the "limit deposit velocity", or
the velocity of "incipient deposition " by various investigators.
In terms of velocity, as velocity decreases, the lines of
constant concentration show a decreasing hydraulic gradient.
At a certain point, where the hydraulic gradient is a minimum,
the constant concentration line goes back up. At a given
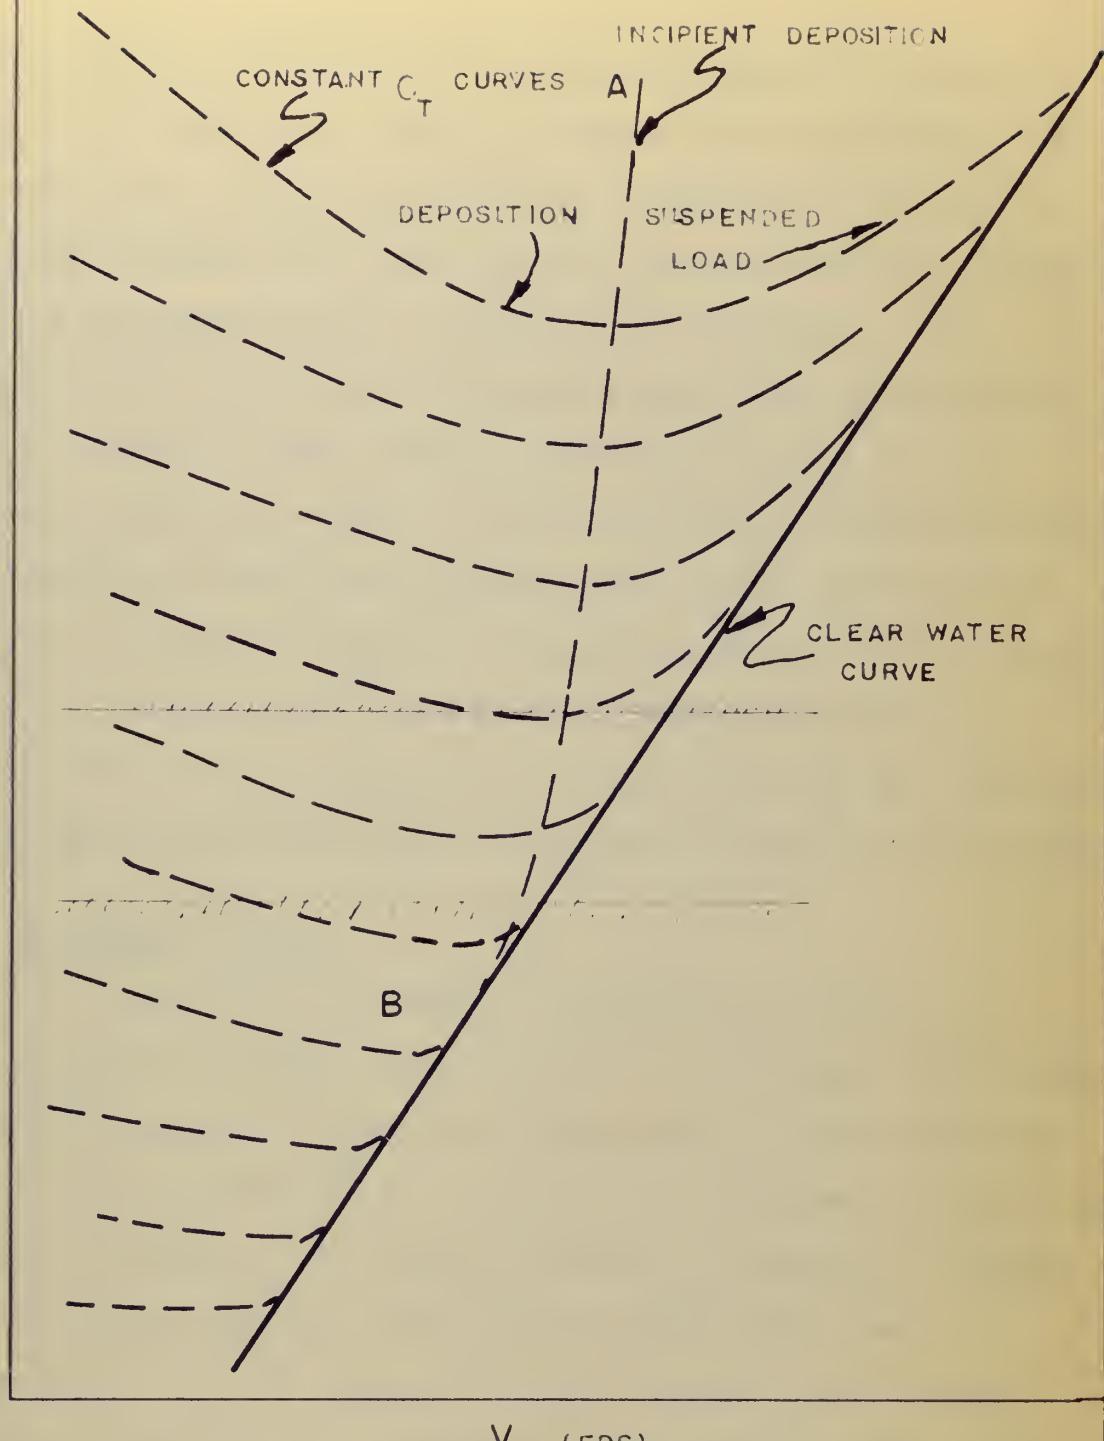
FIG.(6) — QUALITATIVE J-V DIAGRAM WITH CURVES OF
CONSTANT TOTAL LOAD (C-10)

concentration, if the rate of flow is decreased, a point is reached at which the flow is no longer able to maintain all the solids in suspension and some of them are deposited in the pipe. Thus, due to deposition, the cross-section of the pipe is decreased and the velocity is increased. The resultant increase in the velocity permits the establishment of a new region, which owing to high velocity is able to maintain solids in motion. Over some range of discharge this equilibrium is maintained without much change in hydraulic gradient. If the quantity of discharge is further decreased, there is actually an increase in the hydraulic gradient. Chamberlain's (C-10) proposal of a criterion for the determination of incipient deposition will be outlined later in this chapter.

E versus W Plots.

Garde (G-1) presents a discussion of the E versus W plot in which, the parameter E represents the energy required per foot of pipe for transporting a unit weight of sediment per second and W is the rate of sediment transport in pounds per second. For sediment sizes of 0.60mm and 0.20mm and the three boundary conditions of Garde (G-1) and Chamberlain's (C-10) work, the curve for the larger size sediment lies above the smaller. This indicates that with an increase in the size of sediment transported, for a given W, E also increases. This may be accounted for by present

turbulent theory by arguing that for large-size sediment the small and large-scale eddies of the flow do not have sufficient energy to supply for transporting solids and therefore additional energy must be supplied. This points up the advantage of transporting solids in as fine a state as possible. Further analysis of the parameter E, provides additional information. Wilson (W-5) first suggested the use of the parameter to express the energy requirement. Since the energy required per foot of pipe is equal to $Q_m J$ and solids transported per second is equal to $\dfrac{Q \gamma_m C_T}{100}$ E will be

$$E = \frac{Q \gamma_m J}{\dfrac{Q \gamma_m C_T}{100}} = \frac{J}{\dfrac{C_T}{100}} \tag{49}$$

Therefore J must be a minimum in order to have E minimum, for the most economical transportation of sediment at a given concentration. (The point will correspond to the "limit deposit velocity".)

It is obvious that the general tendency of all E:W curves is for E to decrease as W increases. Therefore, it is more economical to transport a given volume of sediment at a large rate than to transport it at a small rate, as far as energy consumed per pound of sediment transported is concerned. For a given amount of sediment, E will be minimum when C_T is maximum, a study of the case where C_T is maximum is necessary.

For a given W, assuming γ_m is fairly constant, if Q is increased, then the corresponding C_T will decrease because

$$W \propto Q \, \gamma_m C_T \quad \text{and} \quad C_T \propto \frac{W}{Q \, \gamma_m} \tag{50}$$

Therefore, if Q is decreased, the concentration for a fixed W will increase. Furthermore, as the discharge is decreased more and more, E will reduce with a corresponding reduction in discharge. But there will certainly be a practical limit beyond which the discharge cannot be decreased in order to take advantage of economy in energy consumption per pound of sediment transported. With a decrease in discharge of water-sediment mixture, the section of pipe will be reduced due to deposition and, after a certain reduction of discharge it may be impossible to maintain a steady flow and the pipe may become clogged. Gardo (G-1) also shows that after reaching a minimum point, E will increase. For a given diameter of the pipe and a given size of sediment, this minimum value of E will depend on the value of W.

Durand's Equation

In 1953 Durand (D-2) gave an equation of the form of

$$\frac{J - J_e}{J_e C_1} = K_1 \left(\frac{\sqrt{gD}}{v} \right)^3 \left(\frac{1}{\sqrt{C_x}} \right)^{1.5} \tag{51}$$

where K_1 is a constant, C_1 is the relative absolute volume of

the sediment, and C_x is the drag coefficient defined by the
equation

$$C_x = \frac{4}{3} \quad \frac{gD}{\omega'^2} \quad \left(\frac{\rho_s - \rho_w}{\rho_w} \right) \tag{52}$$

where ω' is the settling velocity of particles. Garde (G-1)
re-examined Durand's work and attempted correction of the
limitation of the original work. A generally graded solids
material was used since a sediment of rather uniform size, and
both the deposition and non-deposition regions were studied.
Results indicated the inadequacy of Durand's equation when
applied to data taken under different and widely varying
conditions.

Resistance Coefficient

The resistance coefficient is discussed from the view
point of both clear water flow and sediment-laden flow.

A. Clear Water - In smooth pipe, f decreases as
Re increases. It has been noted by several investigators that
the Karman-Prandtl equation for turbulent flow in smooth
pipes fits clear water reasonably well and hence the values
of f can be estimated for smooth pipe using this equation.

$$\frac{1}{\sqrt{f}} = 2 \log_{10} \text{Re} \sqrt{f} - 0.80 \tag{53}$$

B. Sediment-laden Flow - Garde (G-1) found for

variation in the resistance coefficient f with Re, using C_T as the third variable and the flow being of the <u>suspended load region</u>, that for the size of sediment used, it was evident that the presence of sediment increased the resistance coefficient f. However, Chamberlain (C-10) using the same equipment but with a smaller diameter sediment, found that the values of f were not affected appreciably by concentration up to the point of incipient deposition. This means that the increase in the size of sediment necessitates additional energy to increase the eddy viscosity so that the larger sediment will be held in suspension. It may, therefore, be logically concluded that an increase in concentration will cause a corresponding increase in the resistance coefficient for a given Re. It also follows that for constant C_T, f decreases with an increase in Re. This may be explained by saying that with an increase in Re, the turbulence-creating eddies supply more and more energy to hold the sediment in suspension and therefore for the same concentration f should decrease with an increase in Re.

When the flow is in the region of <u>deposition</u>, the resistance coefficient is found to consist of the composite effect of various energy losses occurring in the pipe. These energy losses are due to (1) Boundary roughness (2) Turbulence (3) Sediment.load carried in suspension (4) Moving sand dunes and (5) Increase in velocity as a result of decrease in cross-section caused by deposition. These effects are interdependent as, for example,

part of the boundary roughness becomes ineffective due to deposition. The problem, therefore, becomes very complicated making it extremely difficult to explain the effect of each of these factors on the value of f.

Use of Parameter Re $\sqrt{f}$.

It has been found that the relative thickness of the laminar sub-layer was inversely proportional to Re $\sqrt{f}$ in the case of clear water flow. Use has been made of this parameter in the study of resistance in alluvial channels and therefore, some investigators have felt that it might also play a significant role in sediment-water flow in pipes. A plot by Garde (G-1) of Re $\sqrt{f}$ versus C_T showed that the slope of the line for all available data was one third and furthermore, there was a tendency for the data to fall on this line regardless of the regime (suspended load or deposition) in which the data was collected. This relationship may be written as follows:

$$Re \sqrt{f} \propto C_T^{1/3} \tag{54}$$

or

$$C_T \propto (Re \sqrt{f})^3 \tag{55}$$

Thus it follows that the sediment load transported is proportional to the cube of the discharge when f is constant. When f is subject to small variation, this proportionality may still be used.

Garde (G-1) carries the above analysis further by assuming that the relative position of the lines on the $Re\sqrt{f}:C_T$ plot was a function of the parameter d/D and a plot was made with d/D as the ordinate and P the intercept on the $Re\sqrt{f}:C_T$ plot, as the abscissa, see Figure (7). The third variable on this plot was d, which gave a series of converging lines for constant values of d. The equations of each line on this d/D:P plot was obtained and the slopes and the intercepts were then plotted as functions of d. The slope relationship is represented by

$$S = 0.89d^{1/3} \tag{56}$$

The plot is shown in Figure (8). The resulting equation was

$$Re\sqrt{f} = \left[\frac{I}{\frac{d}{D}}\right]^{S_1} C_T^{1/3} \tag{57}$$

where $S_1 = \frac{1}{S}$ and I is the intercept obtained from Figure (8). It is particularly interesting to note that three parameters have been evolved by the foregoing process. The first $Re\sqrt{f}$ describes the flow and may also be considered as $\frac{VD}{\nu}$, which is the shear velocity Reynolds number, or as the relative thickness of the laminar sub-layer. The second parameter C_T is the concentration of the total load. The third parameter, $\left[\frac{I}{\frac{d}{D}}\right]^{S_1}$ relates the sediment size to the size
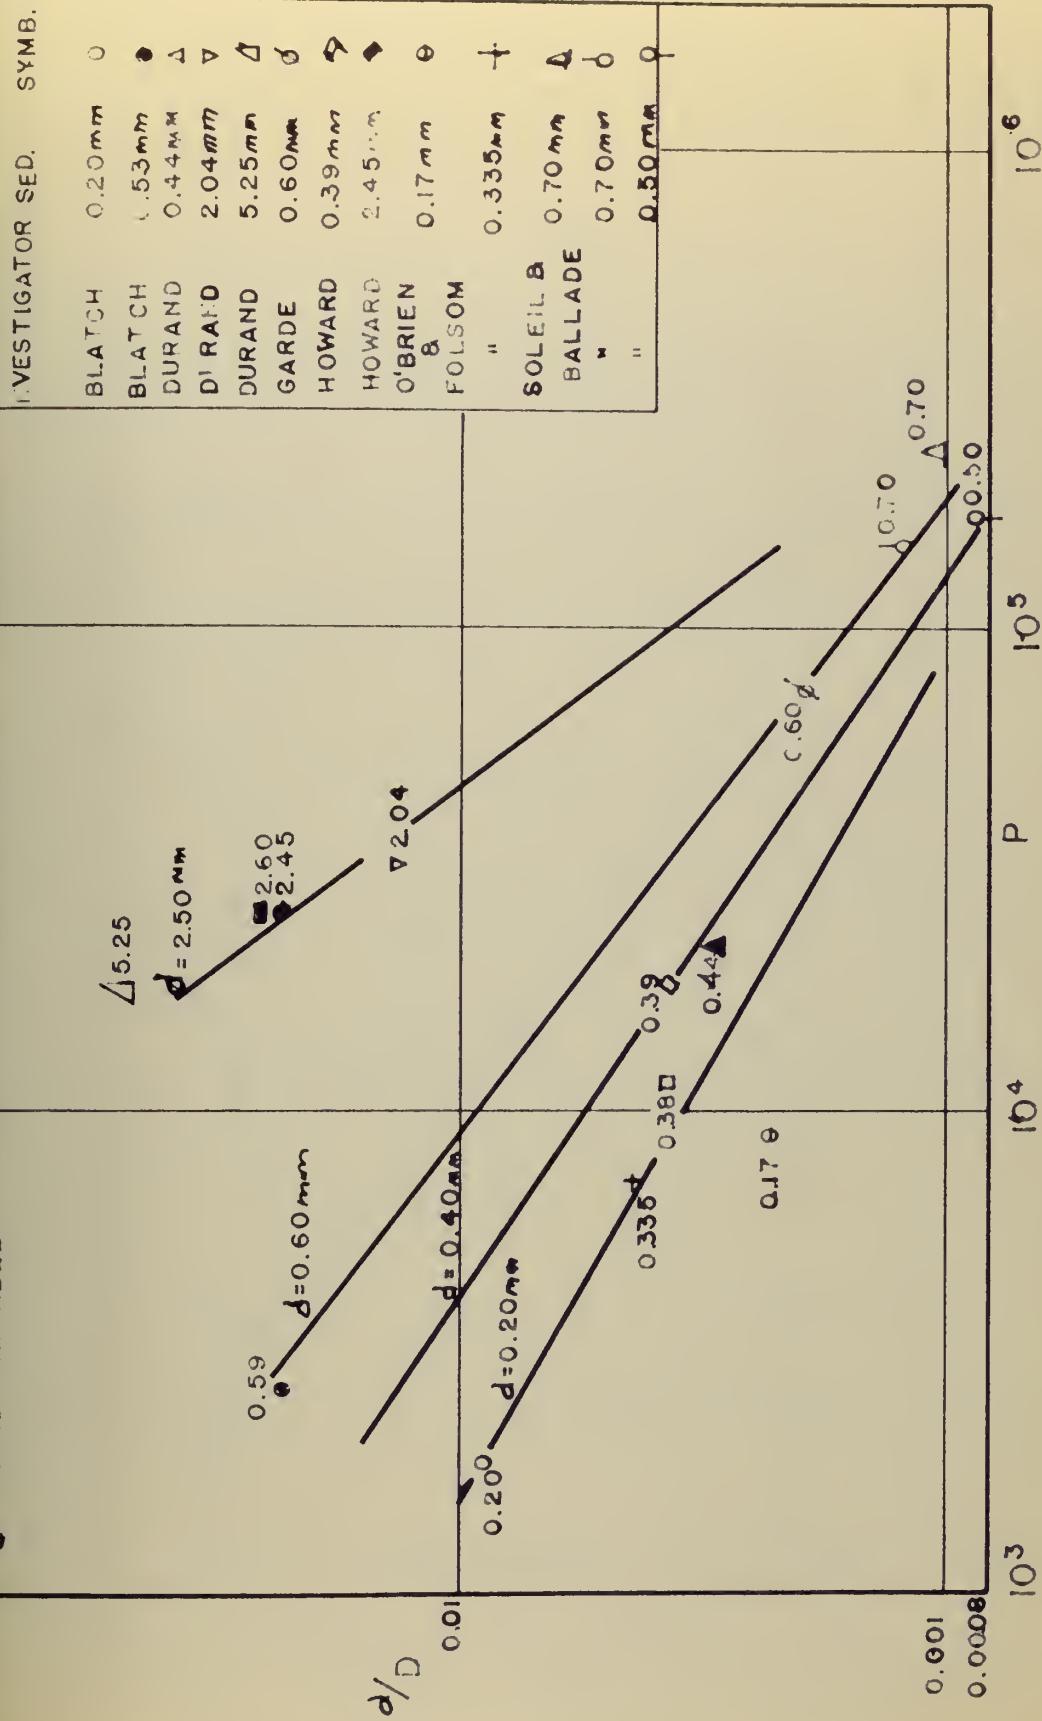
FIG. (7)— VARIATION OF P WITH d/D AND d (G-1)
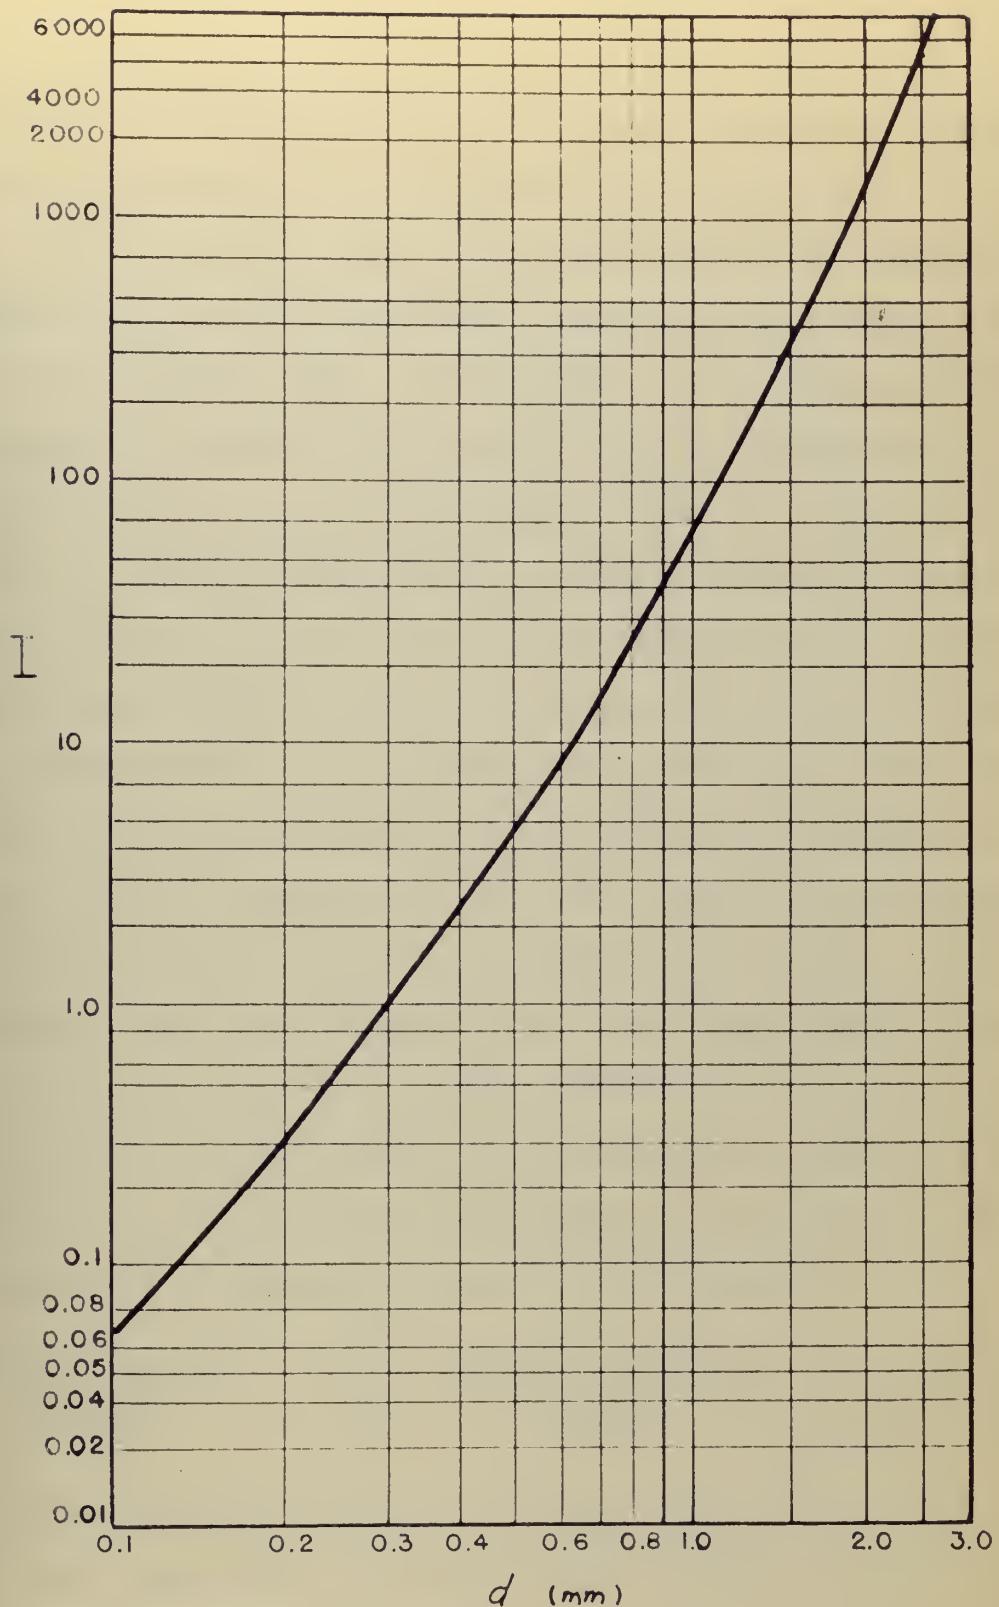
FIG. (8) — VARIATION OF 'I' WITH d (G-1)

of pipe and therefore may be considered as describing the
relative geometry of the pipe and the sediment.

To verify the above equation, Garde (G-1) plotted all
available data from different observers and varying conditions
of flow, regime, etc. An excellent correlation obtained, as
is shown in Figure (9), in spite of the difficulties in
standarization of the data presented in the literature of this
field. Certain limitations do obtain, however. When the slopes
and intercepts of the lines in the d/D:P plot are plotted against
the sediment size d, they are represented by relationships which
are dimensional. To overcome this difficulty, Garde thought
that the standard deviation of the size distribution of the sediment
might provide a dimensionless term. However, the limited data
available on the standard deviation did not help. It is also
possible that the "length" term d might be a part of some sort
of Richardson number or other parameter involving the difference
in specific weight between the sediment and water. A second
limitation is that any relationship between d/D, C_T, Re, and f
should be a continuous function in the range.

$$\text{Clear water regime} \longrightarrow \text{Suspended load regime} \longrightarrow \text{Deposition regime}$$

The relationships given by equation (57) is not valid when C_T
is zero, since when sediment is not present I, d/D, and S_1 are
not defined and C_T is zero.
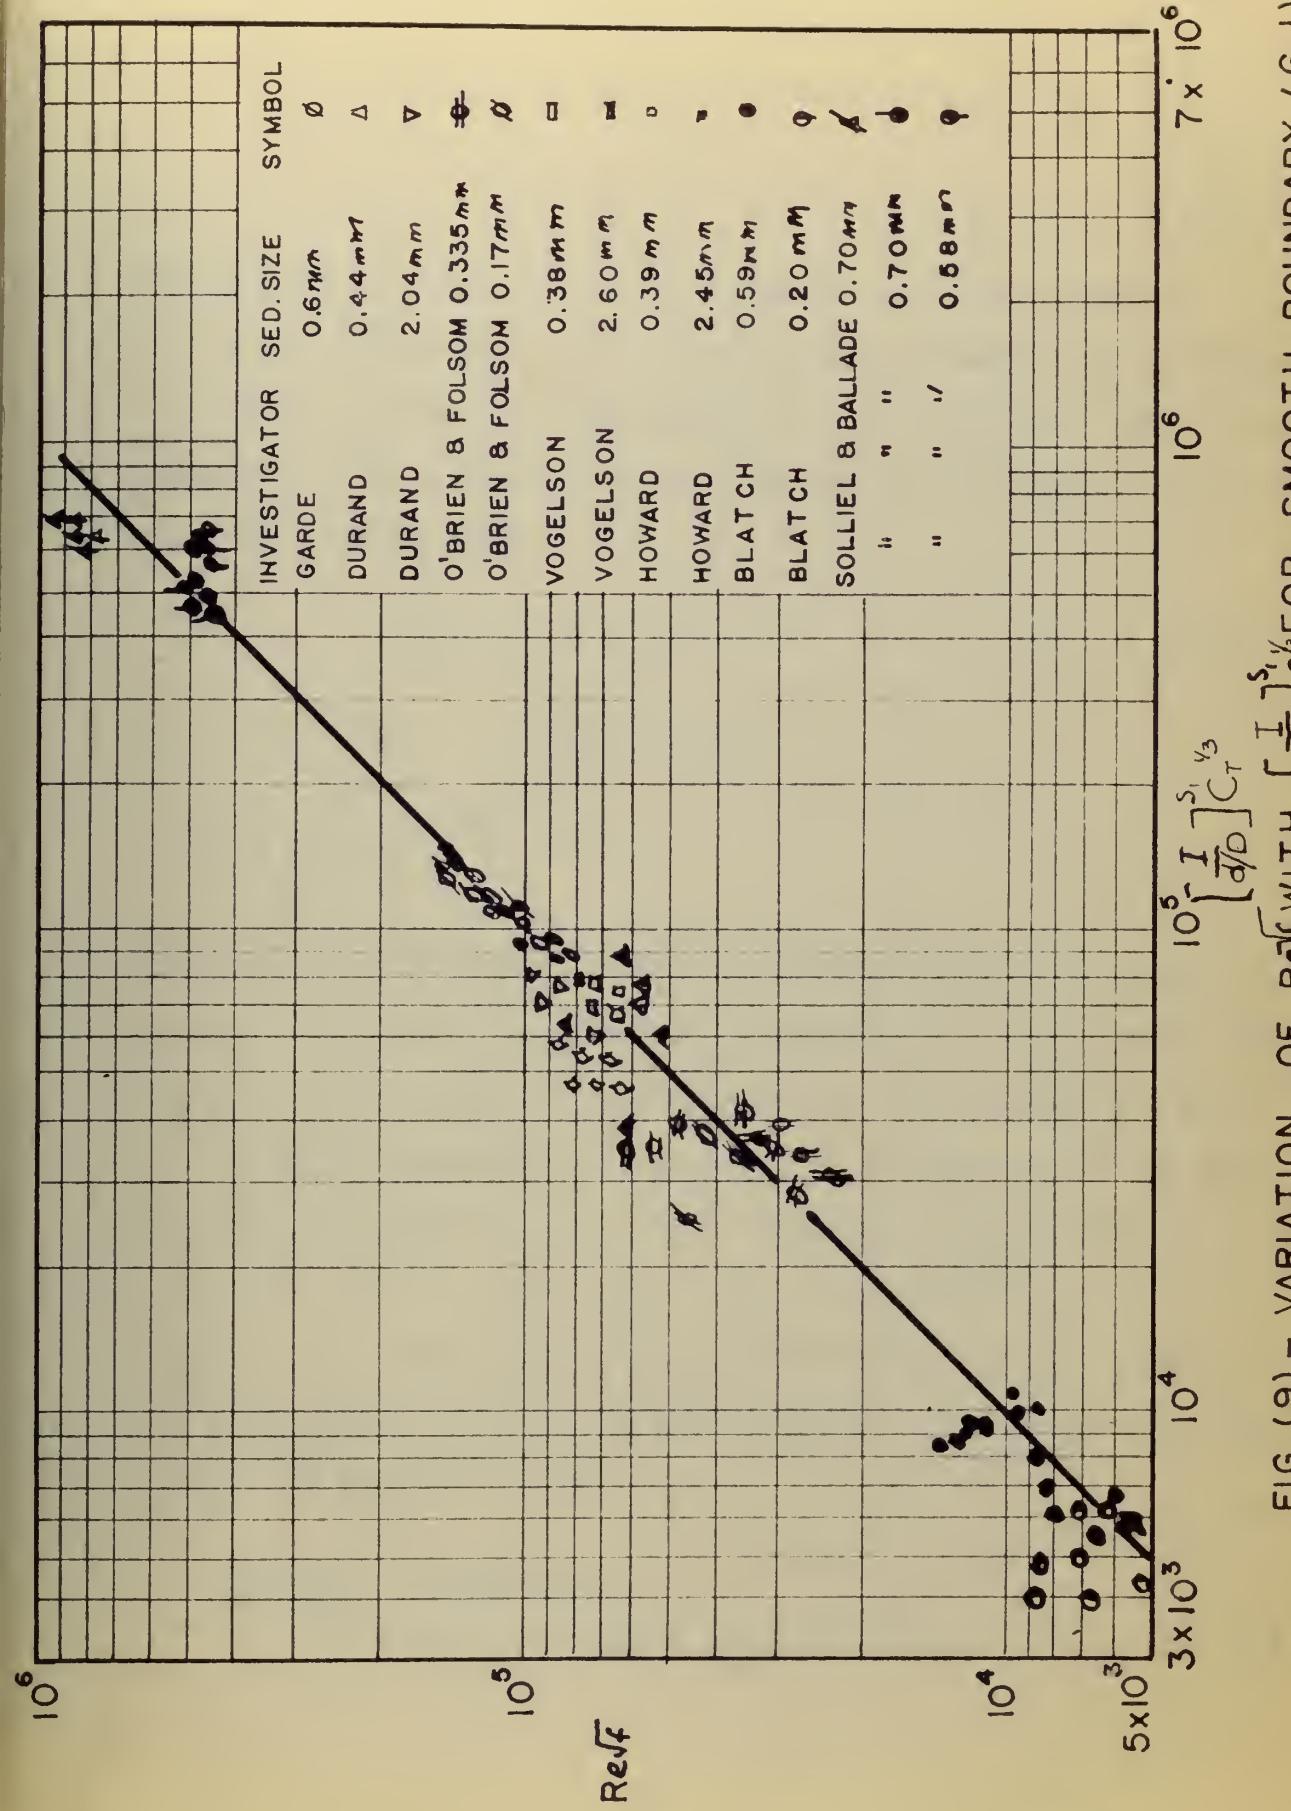
FIG. (9) - VARIATION OF $Re\sqrt{f}$ WITH $\left[\frac{1}{d/D}\right]^{S_1,1/3}_{C_T}C_T^{1/3}$ FOR SMOOTH BOUNDARY (G-1)

INVESTIGATOR	SED. SIZE	SYMBOL
GARDE	0.6 mm	∅
DURAND	0.44 mm	△
DURAND	2.04 mm	▽
O'BRIEN & FOLSOM	0.335 mm	⊕
O'BRIEN & FOLSOM	0.17 mm	∅
VOGELSON	0.38 mm	□
VOGELSON	2.60 mm	▮
HOWARD	0.39 mm	◌
HOWARD	2.45 mm	▸
BLATCH	0.59 mm	●
BLATCH	0.20 mm	⦿
SOLLIEL & BALLADE	0.70 mm	⬥
" " "	0.70 mm	◖
" " "	0.58 mm	◗

Garde suggests an expression of the form of:

$$f = \psi \, (\text{Re}, \; C_T, \; d/D \,) \; = \; f_1 + f_2 \qquad\qquad (58)$$

where f_1 = that part of f contributed by clear water

f_2 = that part of f contributed by inclusion of sediment.

To overcome the discrepancy for the present, Garde (G-1) suggests testing the value of f found under equation (57) against the value of C_T from

$$10^m \; = \; N \, C_T^{\,1/3} \qquad\qquad (59)$$

where $m = \dfrac{1}{2} \; (\dfrac{1}{\sqrt{f}} + 0.8)$

and $N = \left[\dfrac{1}{\frac{d}{D}} \right]^{-S_1}$

If C_T is less than this computed value, then the relationship of equation (57) is <u>not</u> valid as such a low concentration and f given by the Karman-Prandtl equation (53) should be used.

A third limitation to the use of equation (57) is that it was developed for a constant value of $\dfrac{\gamma_s}{\gamma_w}$ equal to 2.65.

In spite of these limitations, Garde believes that results can be obtained with 10 to 15% accuracy. Sample problems are worked out by Garde (G-1)

Incipient Deposition.

It can be concluded from the discussion on the J-V

curves that the minimum of a C_T constant curve on the J-V
diagram is important in determining the minimum energy required
for transporting a given total load. Figure (10) shows a
plot of C_T versus V in which the dividing line between
deposition and suspension is plotted. Chamberlain (C-10)
indicates that this straight line is purely a matter of
judgment, i.e., "an empirical conclusion in every sense of
the word". Figure (11) results from extracting the limit
velocities V_L from Figure (10) and plotting against C_T. Still
further, if V_L is inserted in the parameter $V/\sqrt{gD}$, as
$V_L/\sqrt{gD}$ then Figure (12) results. Referring to Figure (12)
for a given boundary, the range of C_T for which an observer
would probably say deposition was occurring is becoming larger
and larger with increasing $V_L/\sqrt{gD}$. This has important ramification
as the horsepower (energy) will vary almost entirely with total
load for large $V_L/\sqrt{gD}$ assuming operation corresponding to
incipient deposition. The importance of this to a dredge
operator is that, for a nearly constant mixture discharge,
a large range of total loads is possible and still maintain
operation near maximum efficiency. Variation of total load
occurs when moving the suction line of a dredge from place to
place. From the standpoint of sediment mechanics, once
$V_L/\sqrt{gD}$ is increased and becomes less dependent on C_T, there
is sufficient large scale eddy transfer energy available to
accommodate a rather large range of total load.

FIG.(10) — VARIATION OF TOTAL LOAD AT INCIPIENT DEPOSITION WITH VELOCITY

(C-10)
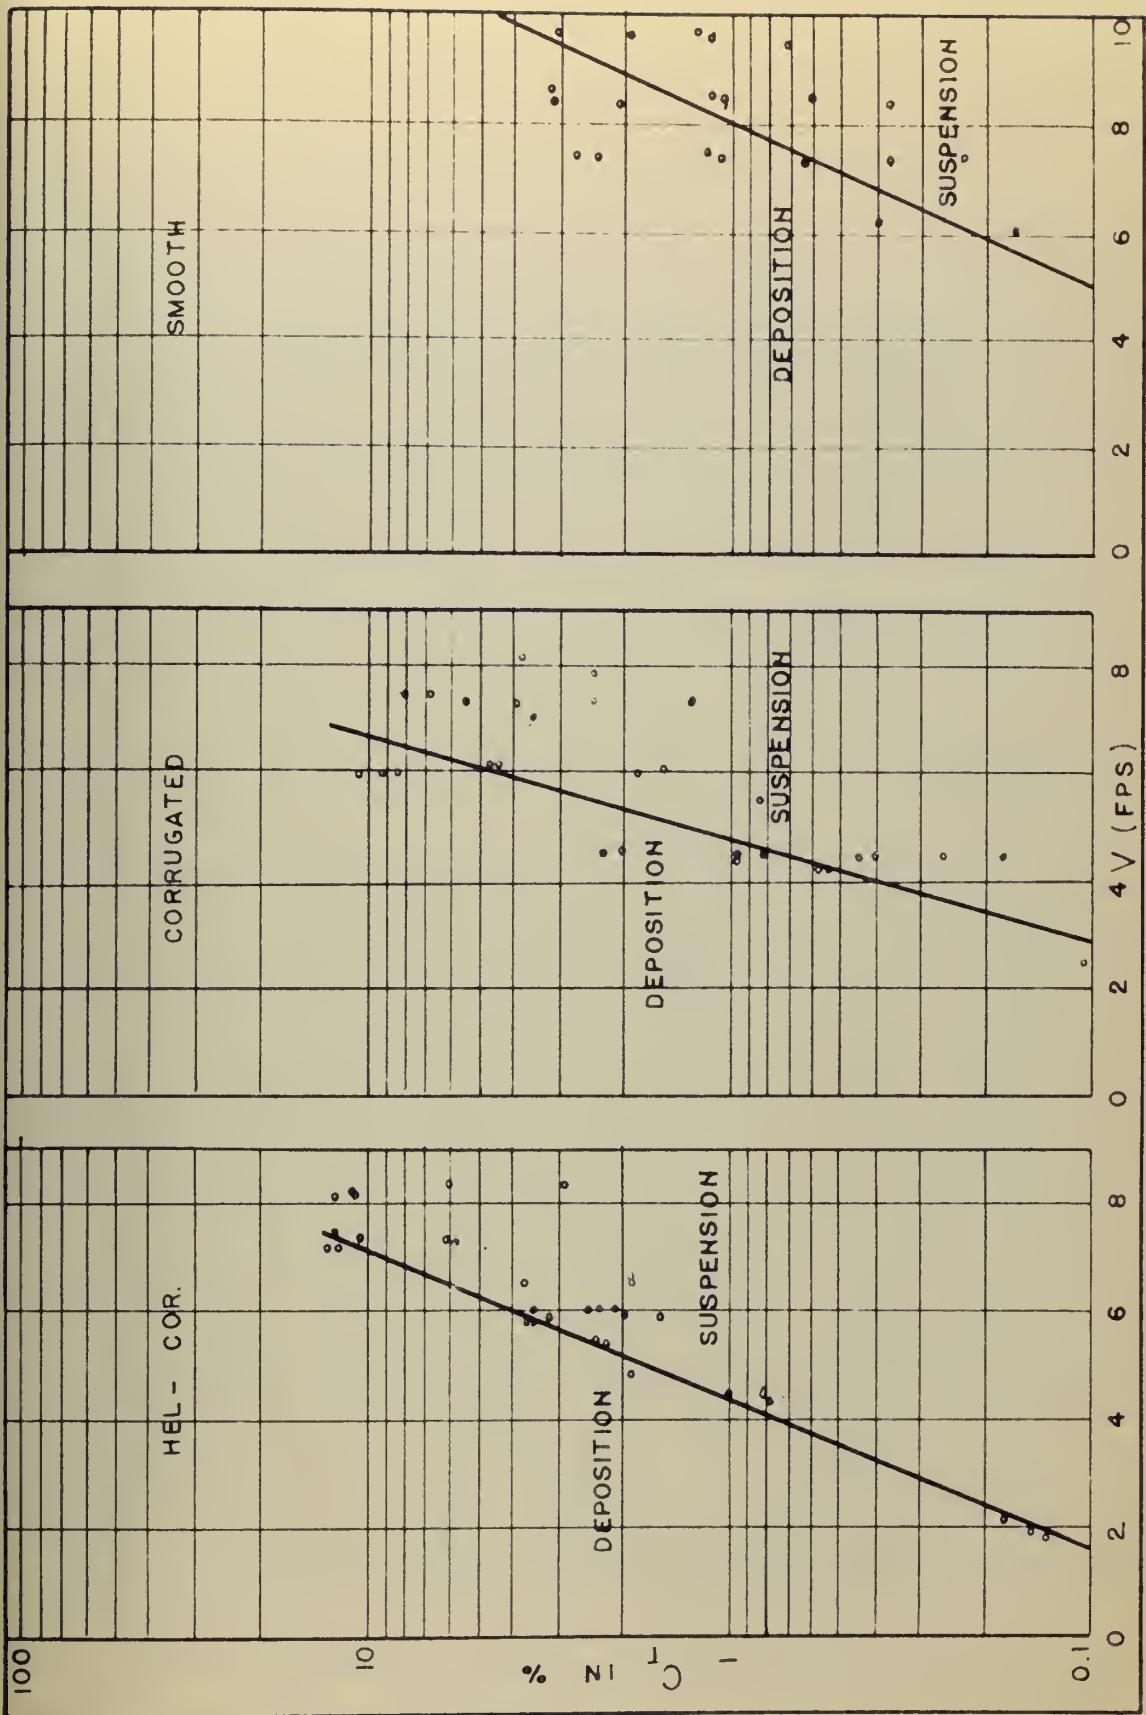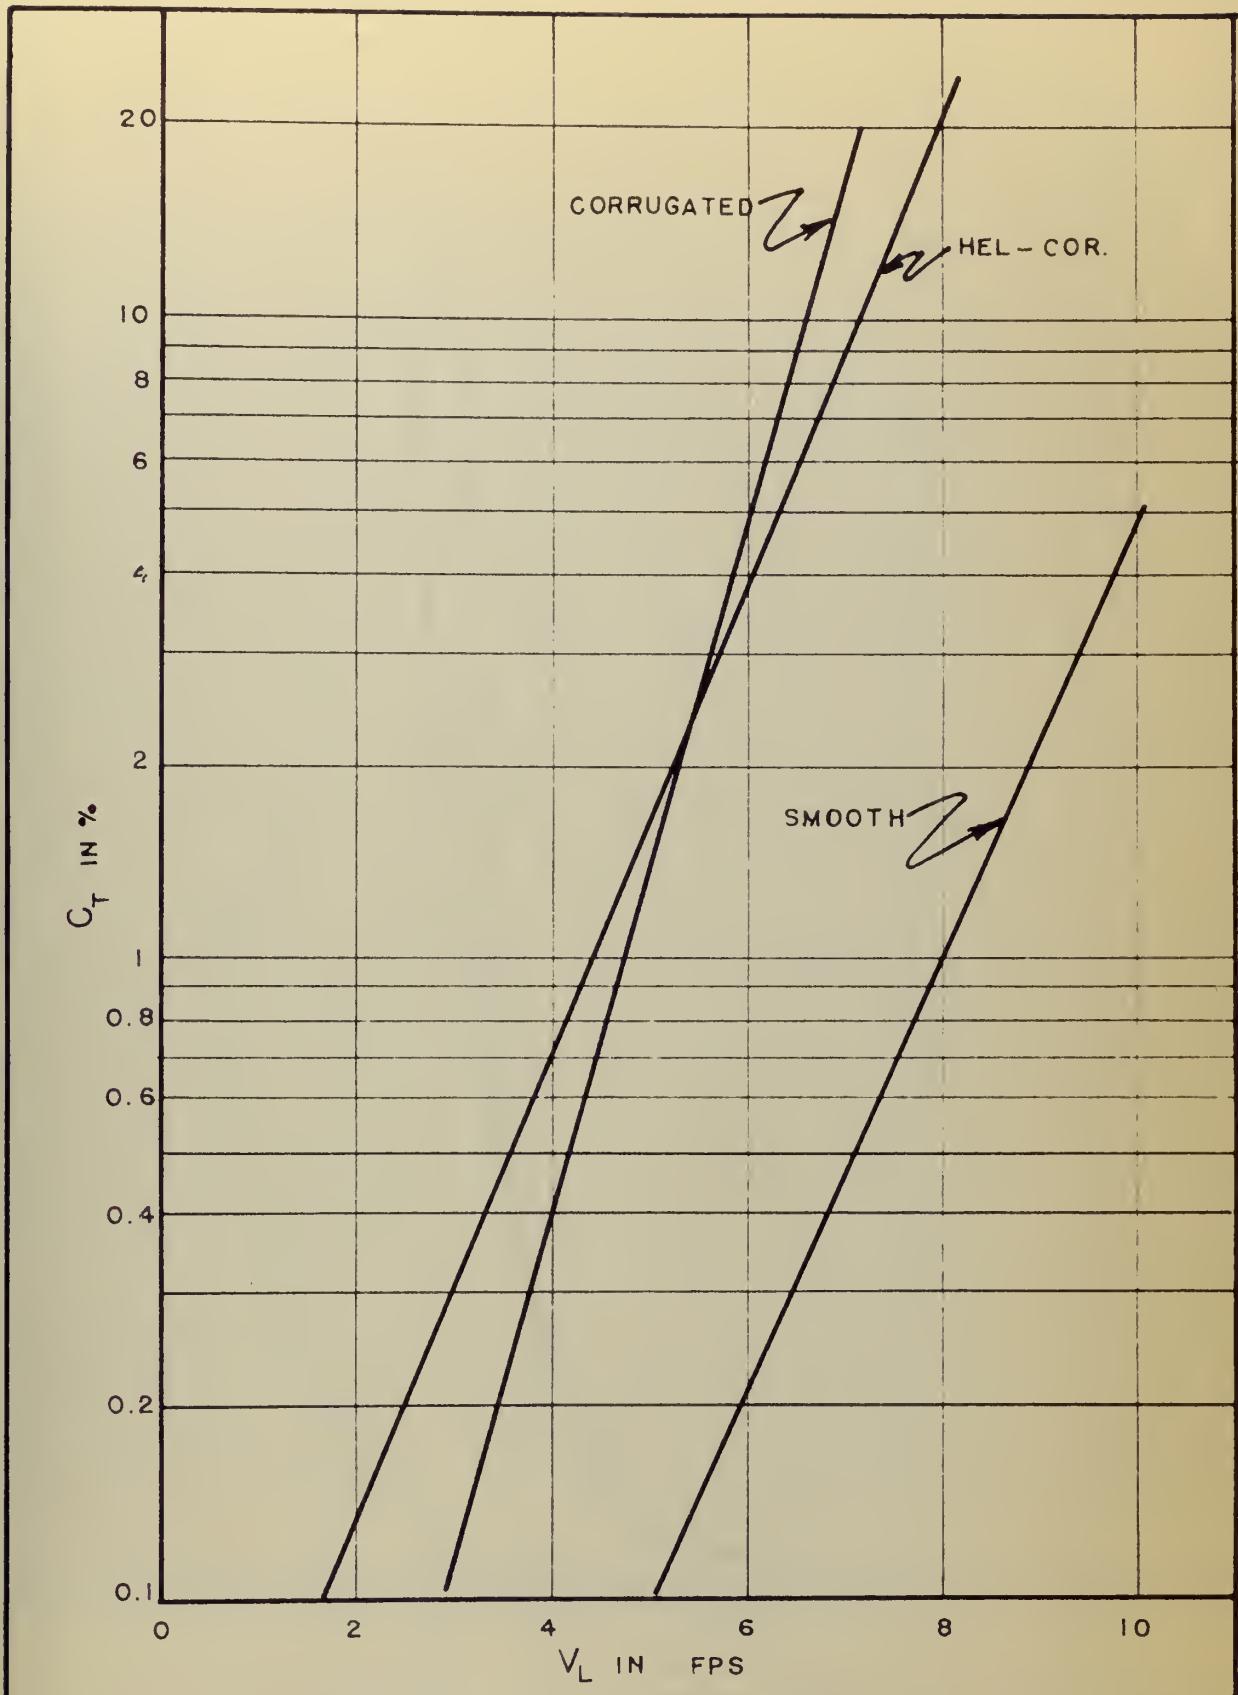
FIG. (11) — COMPARISON OF TOTAL LOAD CURVES AT
INCIPIENT DEPOSITION (C-10)
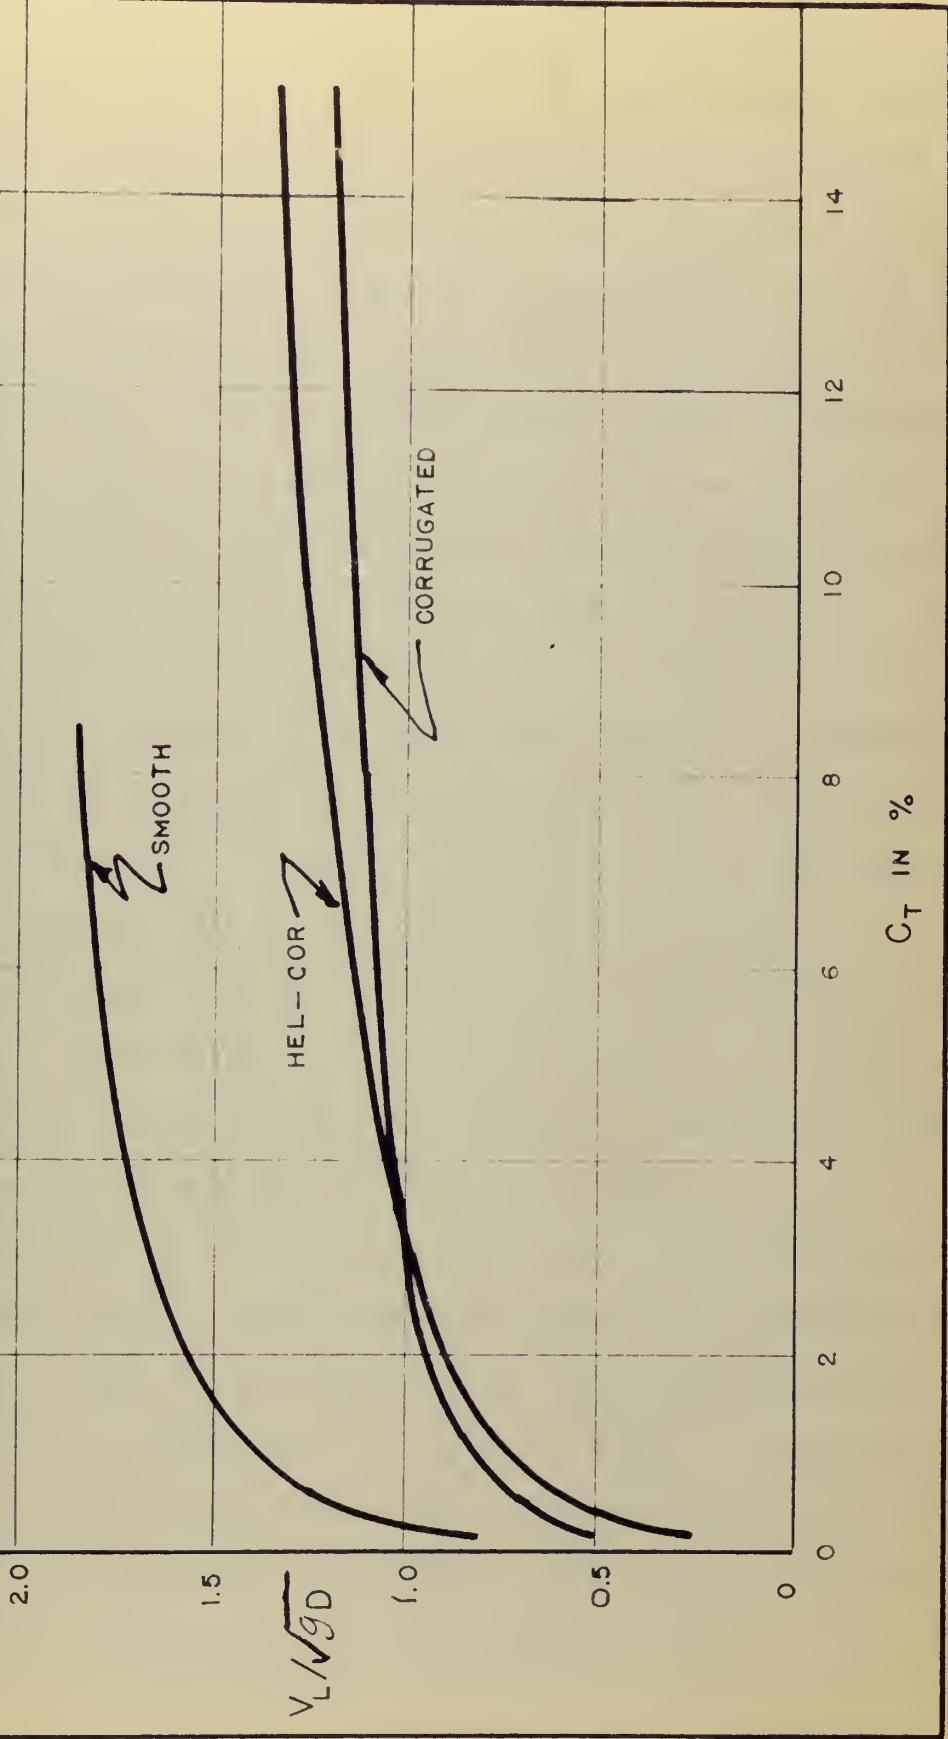
FIG. (12) — VARIATION OF LIMIT DEPOSIT VELOCITY PARAMETER WITH TOTAL LOAD (C-10)

Chamberlain (C-10) reports the establishment of an absolute criterion for incipient deposition. Consider Figure (13), a plot of C_T versus C/C_T at $y/D = 0.06$ for each $V/\sqrt{gd}$. Data in Chamberlain's study was insufficient for a complete analysis, but the trend is certainly evident and significant. The importance of the $V_L/\sqrt{gD}$ versus C_T plot in comparative studies of various pipes for design problems involving horse-power, rate of sediment discharge and excessive water losses points out the need for an evaluation of incipient deposition other than that of visual observation, which is not the same for any two observers, to determine incipient deposition. Chamberlain proposes that the maximum C/C_T, for a constant $V/\sqrt{gD}$ on a C/C_T versus C_T plot for a given y/D, be used in determining the C_T for incipient agradation.

The magnitude chosen for y/D is not important as long as it is consistent for a complete set of runs in a given pipe and picked somewhere near the bottom of the pipe so that appreciable differences in C/C_T are found.

Sufficient evidence has been presented by many investigators to prove that the most economical point for operating a sediment transport line is associated with incipient deposition. Figure (13) demonstrates that, as $V/\sqrt{gD}$ is increased, there was an increasingly large range of C_T over which an observer would say deposition was about to begin. The maximum becomes less and less distinct for increasing $V/\sqrt{gD}$.
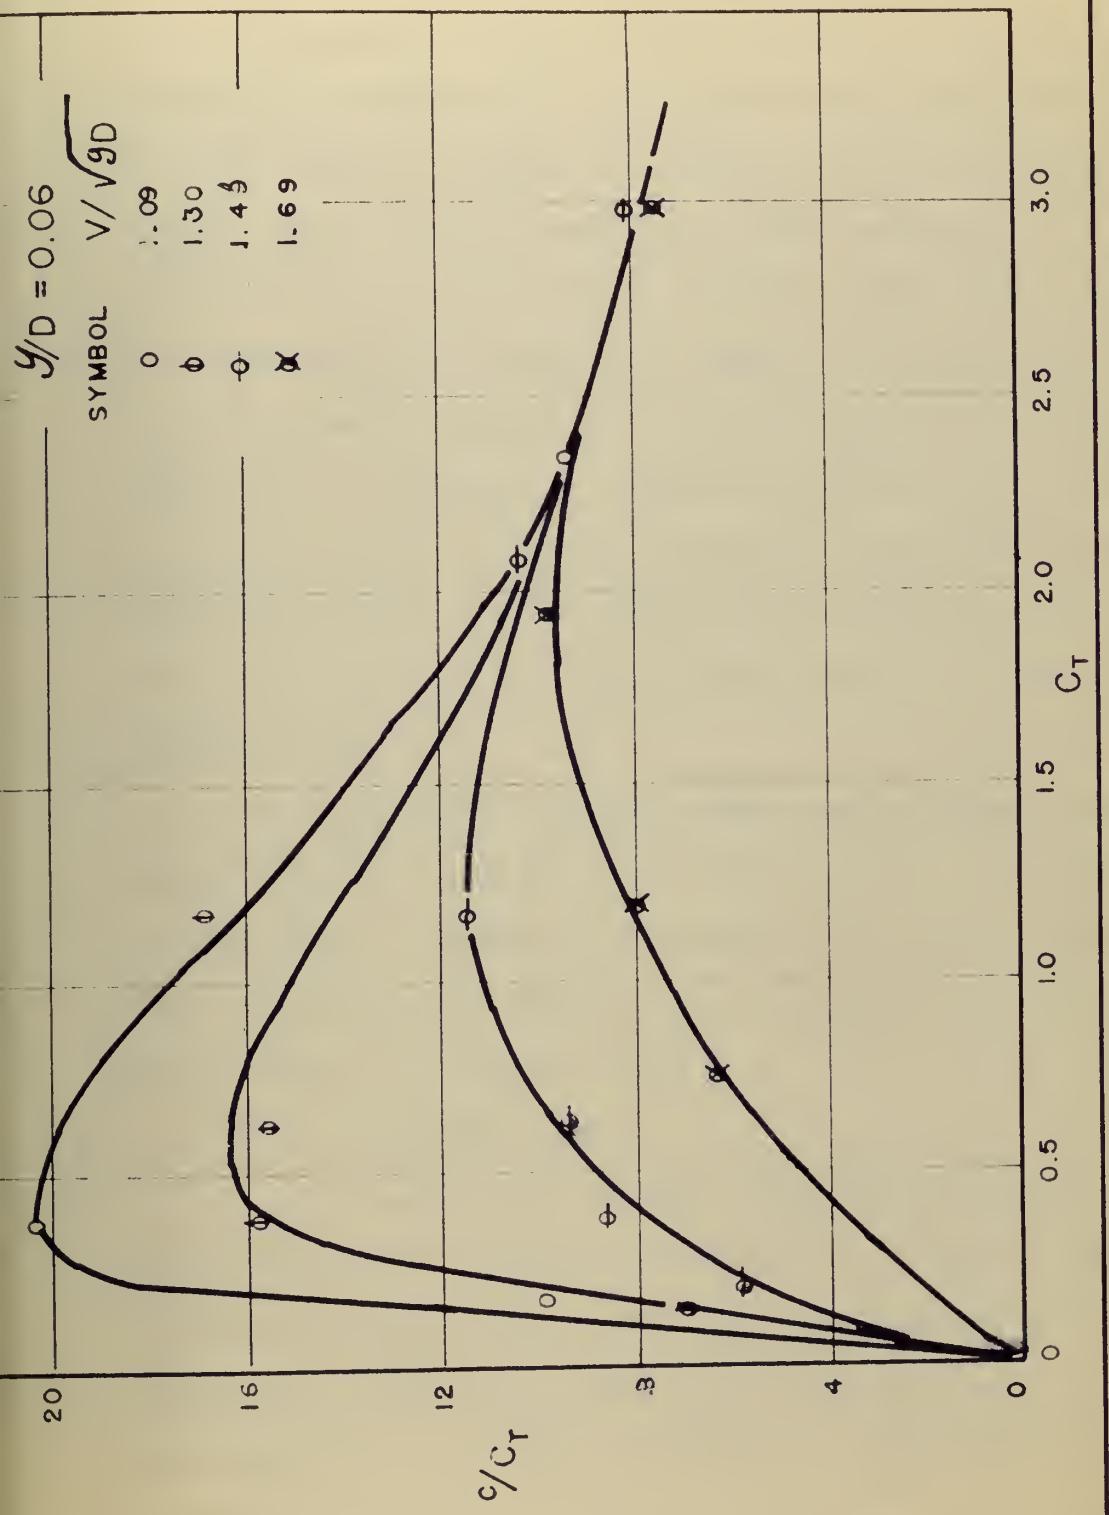
FIG.(13) – ABSOLUTE CRITERION FOR INCIPIENT DEPOSITION – 12" SMOOTH PIPE
(C–10)

CHAPTER V. CONCLUSIONS

The general "rule of thumb" practice based on practical
experience accumulated under actual operating conditions for
dredge pipeline design and operation has established procedures
which, while entirely empirical, have proven to be generally
satisfactory. Much of this empirical data and procedure is
well protected by individual firms as "trade secret information"
and is closely guarded to prevent access by competing firms.
Thus, it is difficult to examine publically the methods currently
in use by dredge operators except in very minor detail.
References (B-2) and (C-14) give as complete a summary of
current methods as has been made available to the public in
printed form.

The conclusions of the author are outlined below. The
major opinion resulting from these is that a greater effort
is required in research on pipeline two phase transport.
The evaluation and application of theory to practice on large
scale tests is urgently needed.

It is concluded that:

1. The most economic pipeline velocity is that
corresponding to incipient deposition. Incipient deposition
deserves further study. The absolute criterion for incipient
deposition proposed by Chamberlain (C-10) needs further
investigation. Accurate definition of the term is greatly
lacking.

2. Friction loss seems best related to concentration
rather than particle size.

3. No conclusion can be made as to the dividing
line between colloidal and water-solids mix. There is little
to commend study of this relationship as an important flow
characteristic.

4. There is a need for extensive applied research
with both full scale and model work to crystallize the physical
relationships of the parameters concerned in two phase transport
systems. The significant parameters in the study of this
problem are J, ρ_s/ρ_w , d/D, C_T, V^2/gD, Re, $\sqrt{f}$ and Re$\sqrt{f}$.
These parameters together with their combinations should be
adequate to solve most transport problems.

5. Within the range of engineering accuracy required
and based on data now available, an "apparent viscosity" for
a given mixture may be used to provide estimates of flow
characteristics.

6. Extensive experimentation and evaluation should
be undertaken to secure further data on the von Karman, K,
and the proportionality constant β , relating the momentum
transfer coefficient, ε_m and the sediment transfer coefficient
ε_s. The relationship elaborated on by Vanoni and Ismail
relating the above to concentration represents the best
theoretical contribution to an explanation of the sediment
(solids) transport mechanism.

7. Published data on sediment transport in practically every case is based on sediment of a single size. Data is needed which covers the entire range of sediment mixture and which corresponds to actual dredging operations.

8. Percentage of solids transported by hydraulic dredge pipeline ranges up to 20% maximum and averages usually less than 15% depending on the character of the solids material. It would seem that this percentage could be increased to secure more economic efficiency.

9. Boundary conditions were not generally emphasized in this thesis. However, the studies by Chamberlain (C-10) and Garde (G-1) of helical corrugated pipe indicated that economies in transport operations can be had under certain conditions.

10. There is a need for study of the best means of instrumentation of dredge pipelines with suitably durable instruments for measurement of solids concentration, velocity, specific gravity, and other flow characteristics on an instantaneous continuous basis.

11. For a given diameter of pipe and sediment size, the minimum value of the energy input, E, will depend on the value of W, the rate of sediment transport. It is much more economical to transport a given volume of sediment at a large rate than a small rate as far as the energy consumed per pound of solids transported is concerned.

12.   Durand's equation tends to be inadequate when
applied to data taken under different and widely varying
conditions.

13.   Friction factor determinations are adequate
to estimate quantities under two phase flow. The von Karman-
Prandtl equation of turbulent flow can be used successfully
and the relationship developed by Garde using the parameter
$Re\sqrt{f}$ certainly has merit under the limiting conditions
set forth by him. Further, verification on large scale operational
dredge equipment is needed.

14.   Dredge operators should make a concerted effort
to provide for more freely exchanged information on practices
and procedures. By such means the industry may more rapidly
expand and achieve the transport economics that are
potentially available.

CHAPTER IV. BIBLIOGRAPHY

A-1   Alves, G. E. and others - "Pipeline Design for Non-
        Newtonian Solution and Suspensions" - Chemical
        Engineering Progress, 48, #8, pp. 385-93
        (August 1952)

A-2   Ambrose, H. H. - "The Transportation of Sands in Pipes,
        II Free Surface Flow" - Proc. Hydr. Conf.,
        Iowa City (1952) 5:77-88 - Bull. 34 Iowa Univ.,
        Studies in Engr. - 1953

A-3   Alves, G. E. - "Flow of Non-Newtonian Suspensions" -
        Chem. Engr., May 1949

B-1   Binder, R. D. and Busher, J. E. - "Study of Flow of
        Plastics Through Pipes" - Joun. of Applied
        Mechanics, 13 A101-105, June 1946

B-2   Bureau of Yards and Docks - "Dredging" - TP-PW-19 -
        1 July 1953

B-3   Bakhmeteff, B. A. - "The Mechanics of Turbulent Flow"
        1st Edit., 1936, Princeton Univ. Press

B-4   Brooks, F. A. and Berggren, W. - "Remarks on Turbulent
        Transfer Across Planes of Zero Momentum-Exchange" -
        Am. Geoph. Union Trans. 25, 889-896, 1944

B-5   Bingham, E. C. - "Fluidity and Plasticity", p.222 - 1922

B-6   Babitt, H. E. and Caldwell, D. H. - "Laminar Flow of
        Sludges in Pipes with Special Reference to
        Sewerage Sludge", U. of Illinois, Eng. Exp. Sta.,
        Bull. #12, Nov. 1939, (Bull. Series 323 and 319,
        1939-1941)

B-7   Blatch, N. S. - "Water Filtration at Washington, D. C." -
        Trans. ASCE Vol. 57, pp. 400-408 (1906)

B-8   Belden, D. H. and Kassel, L. S. - "Pressure Drops
        Encountered in Conveying Particles of large Diameter
        in Vertical Transfer Line" - Ind. and Eng. Chem. 41 -
        June 1949

B-9   Brautlecht, C. A. and Sethi, J. R. - "Flow of Paper
        Pulps in Pipelines" - Ind. and Engr. Chem., 25 -
        March 1933

B-10   Bergelin, O. P. - "Flow of Gas-Liquid Mixtures" - Chem.
            Engr. - May 1949

B-11   Bergelin, O. P. and Gazely, C. Jr. - "Co-current gas-
            Liquid Flow I Flow in Horizontal Tubes" - Heat
            Transfer and Fluid Mech. Inst. - 1949

B-12   Boelter, L. M. K. and Kepner, R. H. - "Pressure Drop
            Accompanying Two Component Flow Through Pipes"
            Ind. and Eng. Chem. 31 - 1939

B-13   Bergelin, O. P. and Others - "Co-current Gas Liquid Flow
            II Flow in Vertical Tubes" - Heat Transfer and
            Fludi Mech. Inst. - 1949

B-14   Bauer, E. E. - "Hydrometer Computations in Soil Studies
            Simplified" - ENR 118 - 1937

B-15   Bird, R. B. and others - "Notes on Transport Phenomena"
            John Wiley and Sons - 1958

B-16   Bird - "Re Number for Non-Newtonian Fluids" - AICHE
            Jour. 2 - 1956

B-17   Brown and others - "Unit Operations" - John Wiley - 1950

C-1   Chien, Ning - "The Present Status of Research on Sediment
            Transport" - Trans. ASCE - Paper #2824 - Vol. 121 -
            1956

C-2   Craven, John P. - 1952 - "The Transportation of Sand in
            Pipes I Full-Pipe Flow" - Proceedings 5th Hyd.
            Conference, State Univ., Iowa

C-3   Cashin, J. A. - "Density of Spoil in Suction Dredging"
            Dock and Harbor Auth. - Nov. 1956

C-4   Cushing, J. F. - "Economical Design of Hydraulic Pipeline
            Dredge" - Paper #1802 - Trans. ASCE - 1932

C-5   Chatley, H. - "Energy Considerations in Dredging" -
            Institution of Civil Engineers - Selected Engineering
            Papers #125 - 1930-1932

C-6   Chatley, H. - "Terminal Velocities" - Union Institution
            of Engineers - Jour. and Record of Trans. -
            Vol. 50 - p. 81 - 1931

C-7   Chatley, H. - "The Principles of Drag Suction Dredging"
            Dock and Harbor Auth. - Aug. 1934

C-8   Chatley, H. - "The Pumping of Granular Solids in
       Fluid Suspension" - Engineering - March 1, 1940 -
       p. 230

C-9   Christianson, E. B. and others - "The Flow of Non-
       Newtonian Fluids in Circular Conduits" - U. of Utah

C-10   Chamberlain, A. R. - "Effect of Boundary Form on Fine
       Sand Transport in 12" Pipes" - Colorado A. & M.
       Dept. of CE - CER #55ARC6 - 1955

C-11   Cramp, W. - "Pneumatic Transport Plants" - Soc. of
       Chem. Industries Journal 44 - 1925

C-12   Clifford, W. - "Friction of Sewage Sludge in Pipes" -
       Inst. of Sanitary Engrs. - London - Trans. - 1924

C-13   Corcoran and others - "Momentum Transfer" - Academic
       Press, N.Y. - 1956

C-14   Collins, A. L. - "The Hydraulic Pipe Line Suction Dredge
       Using the Revolving Cutter" - Bull. #35 - Perm.
       Int. Assoc. of Navigation Congresses - Brussels -
       1951

C-15   Corps of Engineers - "Dredging, Dustpan and Plain Suction
       Dredges" - E204.7 (5-49) ML - The Engr. School,
       Fort Belvoir, Va.

C-16   Corps of Engineers - "Dredging, Cutterhead Dredge Operation"
       E204.6 (4-49) ML - The Engr. School, Fort Belvoir, Va.

C-17   Corps of Engineers - "Dredging, Cutterhead Hydraulic
       Dredges" - E204.5 (4-49) ML - The Engr. School,
       Fort Belvoir, Va.

C-18   Corps of Engineers - "Dredging, Dredge Types and Fields
       of Use" - E204.2 (4-49) ML - The Engr. School,
       Fort Belvoir, Va.

C-19   Corps of Engineers - "Dredging, Orientation and
       Description" - E204.1 (4-49) ML - The Engr.
       School, Fort Belvoir, Va.

D-1   Durand, R. - "The Hydraulic Transportation of Coal and
       Other Solid Material in Pipes" - Paper at
       Colloquium of National Coal Board - 11-5-52 -
       London

D-2   Durand, R. - 1953 - "Basic Relationships of the Trans-
           portation of Solids in Pipes" - Proc. Minnesota
           Intern. Hyd. Conv., Minneapolis, Minnesota - pp. 89-
           103

D-3   Dent, E. J. - "Pipeline Dredges" - Prof. Memoirs U.S.
           Army - Vol. VII - #31 - pp. 213-247 - 1915

D-4   Durepaire, P. - "Dredging Research in France" - Dock
           and Harbor Auth. - July 1939

D-5   Danel, P. F. - "Discussion-Transportation of Sand and
           Gravel in a Four Inch Pipe" - ASCE Trans. 104 - 1939

D-6   Dougherty, R. W. - "A Survey on the Hydraulic Trans-
           portation of Coal" - U.S. Bureau of Mines Report
           of Investigations 4799:1-22 - July 1952

D-7   Durepaire, M. P. - "Discussion: Transportation of Sand
           and Gravel in a Four Inch Pipe" - Trans. ASCE
           104:1369-72 - 1939

D-8   da. C. Andrade, E. N. - "Viscosity and Plasticity" -
           New York Chemical Publishing Co., Inc. - 1951

D-9   Dryden and Others - "Hydrodynamics" - Dover, N.Y.

D-10   Deissler - National Advisory Committee on Aeronautics
           Report #1210 - 1955

D-11   Deissler - National Advisory Committee on Aeronautics
           Tech. Note #2138 - July 1950

D-12   Danel, P. F. - "Charriage en Suspension" - International
           Assoc. of Hydraulic structures Research - Stockholm,
           Sweden - Report of Second Meeting - Appendix 7

D-13   Durand, R. - "Transport hydraulique de groviers et galets
           en conduits" - La Houille Blanche, N.S. 6 -
           Oct. 1951

D-14   Durand, R. - "Transport hydraulique des materiaux
           solides en conduits" - La Houille Blanche N.S. 6
           May and June 1951

D-15   Durand, R. and Condolios, E. - "Etude experimentale du
           refoulenent des materiaux en conduits" - Soc.
           Hydrotechnique de France - Compte Rendu des 2 emes
           Journees de l'Hydraulique - 1952

D-16   Durepaire, M. P. - "Contribution a l'etude du dragage
             et du refoulement des deblais a l'etat de mixture" -
             Extrat des annales des Ponts et Chaussees,
             Fasc II, Fevrier, 1939

E-1   Eyring and others - "Theory of Rate Processes" -
             McGraw Hill - 1941

E-2   Eyring and others - No title - Ind. and Eng. Chem. 33
             1941

E-3   Eyring and others - No title - Chem. Revs. 28 - 1941

E-4   Einstein, H. A. and Chien, N. - "Second Approximation
             to the Solution of the Suspended-Load Theory" -
             Sediment Series #3 - Corps of Engrs., Missouri
             River Division, Dept. of Army - Omaha, Neb. - 1954

F-1   Farbar, L. - "Flow Characteristics of Solids-Gas
             Mixture in a Horizontal and Vertical Conduit" -
             Ind. and Eng. Chem. 41: July 1949

F-2   Fage, A. and Townsend, H. C. H. - "Examination of
             Turbulent Flow with an Ultramicroscope" - Proc.
             Roy. Soc. - London 135A - 1932

G-1   Garde, R. J. - 1956 - "Sediment Transport Through Pipes" -
             Masters Thesis - Dept. of C.E. - Colo. St. Univ. -
             Ft. Collins, Colo.

G-2   Gregory, W. B. - Pumping Clay Slurry Through a Four-Inch
             Pipe" - Mech. Engineering - Vol. 49 - June 1927 -
             pp. 609-16

G-3   Gazely, C. Jr. - "Co-current Gas Liquid Flow III Intensified
             Shear and Stability" - Heat Transfer and Fluid
             Mech. Inst. - 1949

G-4   Green, H. - "Industrial Rheology and Rheological
             Structures" - John Wiley and Sons - 1949

G-5   Gazely, C. Jr. and Bergelin, O. P. - "A Preliminary
             Investigation of Two Phase Flow" - U. of Del. Report
             TPF-1 -   May 1947

G-6   Gazely, C. Jr. - "Interfacial Shear and Stability in
           Two Phase Flow" - PhD. Thesis, U. of Del. - 1948

G-7   Goldstein - "Modern Developments in Fluid Mechanics" -
           Oxford Univ. Press - 1938

G-8   Giroux, C. H. - "American Hydraulic Dredges" - ASCE Vol.
           CT1180 - 1953

H-1   Hartley, A. C. - "Transportation by Pipeline" - Dock
           and Harbor Auth. Vol. XXXIV - #459 - Jan. 1959

H-2   Hanocq, C. - "Experimental Study of Loss of Head in a
           Closed Pipe Carrying Clay Slurry" - Trans. ASME
           Vol. 51 - Hyd. 51-8 (1929)

H-3   Harper, R. C. Jr. and Riseman, J. - "Interpretation of
           Plastic Viscosities in Terms of Newtonian Viscosities'
           Jour. of Colloid Science 9, 81 - 1954

H-4   Hedstrom, B. O. A. - "Flow of Plastic Materials in Pipes"
           Ind. Engr. Chem 44 - 651 - 1952

H-5   Hariu, O. H. and Molstad, M. C. - "Pressure Drop in
           Vertical Tubes in Transport of Solids by Gases"
           Ind. and Engr. Chem. 41 - June 1949

H-6   Howard, G. W. - "Transportation of Sand and Gravel in
           a 4" Pipe" - Trans. ASCE 104 - 1939

H-7   Howard, G. W. - "Effect of Rifling on 4" Pipe Trans-
           porting Solids" - Trans. ASCE 106 - 1941

H-8   Hazen, Allen - "On Sedimentation" - Trans. ASCE LIII - 1904

H-9   Hurell, G. E. - "Dearborn Sewage Sludge Pumped Through
           Long Pipeline" - ENR III - Sept. 1933

H-10   Hunsacker and Rightmire - "Engineering Applications of
           Fluid Mechanics" - McGraw Hill, N. Y. - 1947

H-11   Head, V. P. - "Shear Criterion for the Hydraulic Behavior
           of Paper Stocks in Pumps, Pipes, Valves and
           Flowmeters" - Tappi 35 - June 1952

H-12   Hunt, J. N. - "The Turbulent Transport of Suspended
           Sediment in Open Channels" - Proc. Royal Soc.
           of London Series A, Vol. 224, #1158 - 1954

I-1   Ismail, H. M. - "Turbulent Transfer Mechanism and
        Suspended Sediment in Closed Channels" -
        Trans. ASCE 117 - pp. 409-446 - 1952

I-2   Imperial College of Chemical Engineers - "A Review of
        Hydraulic Surveying of Solids in Pipelines" -
        Journal 7 - pp. 101-110 - 1953

J-1   Journal of Applied Physics - "Rheological Properties
        of Colloidal Solutions" - 14, pp. 569-576 - July
        1943

J-2   Jenkins, R. - "Two Phase Two Component Flow of Water
        and Air" - MChE Thesis, U. of Del. - 1947

J-3   Johnstone and Thring - "Pilot Plants, Models and Scale
        up Methods in Chem. Eng." - McGraw Hill - 1957

K-1   Krieble, J. G. and Whitwell, J. C. - "The Viscosity of
        Newtonian, Pseudoplastic and Dilatant Liquids" -
        Textile Rex., J. 19 - 1949

K-2   Kestlicher, D. - "Pertes de Charge Dans les Conduites
        alimentees en eau Contenant des Fines Particules
        Solides" - Societe Hydrotechnique de France -
        Compte Rendo des 2 emes Journees l'Hydraulique -
        1952

L-1   Laval, D. - "The Trend of Recent Developments in
        Dredging Craft and Their Use" - International
        Navigation Congress - Rome - 1953

L-2   Lunnon, R. G. - "The Laws of Motion of Particles in a
        Fluid" - Institution of Mining Engrs. - Trans.
        Vol. LXXVII - 1929

L-3   Lewis, W. K. - "Industrial Chemistry of Colloidal and
        Amorphous Materials" - N. Y. McMillan Co. - 1942

L-4   Lamb - "Hydrodynamics" - 1st Amer. Ed. Dover, N. Y. - 1945

M-1   Moody, L. F. - "Friction Factors for Pipe Flow" - Trans.
        ASME 66 - pp.671 - 1944

M-2   Motzner, A. B. - "Pipeline Design for Non-Newtonian
        Fluids" - Chem. Engineering Progress 50, 27-34 -
        January 1954

M-3   Melrose and others - "A Practical Utilization of the
        Theory of Bingham Plastic Flow in Stationary
        Pipes and Annuli" - Jour. of Petroleum Tech.
        Paper #876-G - 10/6/57

M-4   Maltby, F. B. - "Hydraulic Dredging on the Mississippi
        River" - Trans. ASCE - Vol. 54c - pp. 391-478 -
        1905

M-5   Morris, H. N. - "Flow in Rough Conduits" - Trans.
        ASCE 120 - 1955

M-6   Mikumo and others - "On the Hydraulic Conveyance of Slime
        Pulps (Copper Ore)" - Jour. Soc. Med. Engrs. of
        Japan XXXVI - 1933

M-7   Mock, W. C. and Dryden, H. L. - "Improved Apparatus for
        the Measurement of Fluctuations of Air Speed in
        Turbulent Flow" - NACA TR.448 - 1932

M-8   Martinelli, R. C. and others - "Isothermal Pressure
        Drop for Two Phase Two Component Flow in a
        Horizontal Pipe" - Trans. ASME 66 - 1944

M-9   Martinelli, R. C. and others - "Two Phase, Two Component
        Flow in the Viscous Region" - Trans. AICHE 42 -
        1947

M-10   Martinelli, R. C. and Lockhart, R. W. - "Proposed
        Correlation of Data for Isothermal Two Phase Two
        Component Flow in Pipes" - Chem. Eng. Progress 45 -
        1949 - and discussion

M-11   McMillen, E. L. - "Simplified Pressure-Loss Calculations
        for Plastic Flow" - Chem. Eng. Progress 44 - 1948

M-12   Mooney, M. - "Explicit Formulas for Slip and Fluidity" -
        J. Rheology 2 - 1931

M-13   McCabe and Smith, J. C. - "Unit Operations of Chem.
        Engr." - McGraw Hill - 1956

M-14   Metzner, A. B. and Reed - No title - AICHE - Jan. 1 -
        1955

M-15   Metzner - "Non-Newtonian Technology" - Advances in
        Chem. Eng. - Vol. #1 - Academic Press, N. Y. - 1956

M-16   Metzner - No title - Annual Meeting AICHE, Chicage -
        Dec. 1957

N-1   Nevitt, T. H. - "Loss of Head in Sewage Sludge Pipe
        at Toronto, Ontario" - ENR 82 - 6 Feb. 1919

O-1   O'Brien, M. P. - "Review of the Theory of Turbulent
        Flow and its Relation to Sediment Transportation" -
        American Geophysical Union - Trans. 14 - pp. 487-
        491 - 1933

O-2   O'Brien, M. P. and Folsom, R. G. - "Transportation of
        Sand in Pipelines" - Univ. of Calif. Publications
        in Engineering - U. of Calif. Press - 1937

O-3   "Ohio to Have First Pipe-line for Coal" - Civil
        Engineering - Sept. 1955 - Vol. 25 - p. 84

O-4   Orrok, G. A. and Morrison, W. S. - "Pipeline Transportation
        for Anthracite and Bituminous Coal" - Power 54 -
        Sept. 1, 1921

P-1   Prelini - "Dredges and Dredging" - D. Van Nostrand - 1911

P-2   Polhemus, J. H. and Dupriest, J. R. - "Friction in
        Dredge Pipes" - Trans. ASCE, Vol. 49-50 - Hyd.
        50-7 - 1927-28

P-3   Prandtl, L. - "Essentials of Fluid Dynamics" - N. Y.
        Hafner Publ. Co. - 1952

P-4   Partington - "Treatise on Physical Chemistry" - Longmans
        Green - 1949

R-1   Rouse, Hunter - "Fluid Mechanics for Hydraulic Engineers" -
        1938

R-3   Rouse and Howe - "Basic Mechanics of Fluids" - John
       Wiley - 1953

R-4   Roscoe, R. - "The Viscosity of Suspensions of Rigid
       Spheres" - Brit. J. Appl. Physics 3 - pp. 267

R-5   Reynolds, O. - "Scientific Papers" - Cambridge Univ.
       Press - Vol. II - 1901

R-6   Richards, R. H. - "Velocity of Galena and Quartz Falling
       in Water" - Trans. Am. Inst. of Mining Engrs. 38 -
       1907

R-7   Rouse, H. - "Elementary Mechanics of Fluids" - John
       Wiley and Sons - 1946

R-8   Reiner, M. - "Deformation and Flow" - London - Interscience
       Publishers, Inc. - 1949

R-9   Rouse, H. - "Engineering Hydraulics" - Proceedings of
       the 4th Hydraulics Conference, Iowa Institute of
       Hydraulic Research - June 12-15, 1949 - John
       Wiley and Sons, Inc., N. Y.

S-1   Simon, F. L. - "Dredging Engineering" - McGraw Hill - 1920

S-2   Sherwood, T. K. and Woerte, B. B. - "Mass Transfer
       Between Phases" - Industrial and Engineering
       Chemistry 31 - pp. 1034-1041 - 1939

S-3   Sandvig, R. L. - "Application of Rotational Viscometers
       Data to the Prediction of Pipe-line Friction
       Losses in the Turbulent Flow of Solid-Liquid
       Suspensions" - Phd. Thesis - U. of Colorado,
       Boulder, Colorado - 1953

S-4   Scott Blair, C. W. - "An Introduction to Industrial
       Rheology" - Phil. - P. Blakiston's Son and Co. -
       1938

S-5   Scott Blair, C. W. - "A Survey of General and Applied
       Rheology" N. Y. and Chicago - Pitman Publishing
       Corp. - 1944

S-6   Schofield, R. K. and Scott Blair, C. W. - "The Influence
       of the Proximity of a Solid Wall on the Consistency
       of Viscous and Plastic Materials" - J. Chem. Phys.
       34 - 1930/35 1931/39 1935

S-7   Scott Blair, C. W. and Crowther, E. M. - "The Flow of
        Clay Pastes Through Narrow Tubes" - J. Phys.
        Chem. 33 - 1929

S-8   Scott Blair, C. W. - "A Further Study of the Influence
        of the Proximity of a solid Wall on the Consistency
        of Viscous and Plastic Materials" - J. Chem.
        Phys. 34 - 1930

S-9   Streeter - "Fluid Dynamics" - McGraw Hill, N.Y. - 1948

S-10 Schlichting - "Boundary Layer Theory" - McGraw Hill,
        N. Y. - 1954

S-11 Soleil, G. and Ballade, P. - "Le transport hydraulique
        des materiaux dans les travaux publics" - Soc.
        Hydrotechnique de France Compte Rendu des Zeme
        Journees de l'Hydraulique - 1952

T-1   Thomas, W. A. - "Practical Piping Flexibility Design
        and Flow" - Consulting Engr. - (Joint Engr. Soc.
        Lib. 621.774 Z539)

T-2   Thoenen, J. R. - "Sand and Gravel Excavation" -
        U. S. Bureau of Mines, Inf. Circ. #6875 - 1936

T-3   Thoreon, R. C. - "Comments on the Hydrometer Method
        of Mechanical Analysis" - Public Roads 14 - 1933

T-4   Traxler, R. N. - "Influence of Solids on Flow Properties
        of Dilute Suspensions" - Paper Trade Journal 104 -
        25 Feb. 1937

T-5   Tison, L. J. - "Resultats d'esaie sur le transport de
        matieres solides, tres fines, dans les conduites"
        Societe Hydrotechnique de France - Compte Rendu
        des 2 eme Jounees de l'Hydraulique - 1952

V-1   Vanoni, V. A. - "Transportation of Suspended Sediment
        by Water" - Trans. ASCE III - 1946

V-2   Vogt, R. G. and White, R. R. - "Friction in the Flow
        of Suspensions" - Ind. and Eng. Chem. 40 - Sept. 1948

V-3   von Karman, T. - "Turbulence and Skin Friction" -
        Journal of Aeronautical Sciences 1 - 1934

V-4   von Karman, T. - "Some Aspects of the Turbulence
           Problem" - Mech. Engineering 57 - 1935

V-5   Vadot, L. - "Quelques reflexions sur les pertes de
           charge" - La Houille Blanche - N.S. 9:165-178 -
           Dec. 1954

W-1   Wilhelm, R. H. and others - "Flow of Suspensions
           Through Pipes" - Industrial and Engineering
           Chemistry, 31 - pp. 622-629 - May 1939

W-2   Wang, Chi-Teh - "On the Velocity Distribution of Turbulent
           Flow in Pipe and Channels of Constant Cross-section" -
           Journal of Applied Mech., 68, A85 - 1946

W-3   Worster, R. C. - "The Hydraulic Transport of Solids" -
           Proc. of a Colloquium on the Hydraulic Transportation
           of Coal - Nat'l Coal Board - 11/5/52 - London

W-4   Winding, C. C. and others - "Flow Properties of Pseudo-
           plastic Fluids" - Chem. Engr. Prog. 43, 527-613 -
           1947

W-5   Wilson, W. E. - "Mechanics of Flow, with Non-Colloidal
           Inert Solids" - Trans. ASCE 107 - 1942

W-6   Wilson, W. E. - "Transportation of Suspended Solids in
           Pipelines" - Am. Inst. of Mining and Met.
           Engineers - Tech. Paper #1785 - March 1945

W-7   Wood, W. A. and Bailey, A. J. - "The Horizontal
           Carriage of Granular Material by an Injector
           Driven Air Stream" - Inst. of Mech. Engrs.
           Proc. 1420 - 1939

W-8   Williamson, R. V. - "The Flow of Pseudoplastic Materials" -
           Ind. Eng. Chem. 21 - 1929

W-9   Waddel - No title - J. of Franklin Inst. 217 - 1934

W-10   Ward, H. C. - "Co-current Turbulent-Turbulent Flow of
           Air and Water Clay Suspensions in Horizontal
           Pipes" - Doct. Thesis - Ga. Tech. - Sept. 1952